beyma

PROFESSIONAL LOUDSPEAKERS
www.beyma.com

12CXA400Fe

COAXIAL TRANSDUCER

KEY FEATURES

- Program power: 800 / 160 W (LF / HF)
- Sensitivity: 96 / 105 dB (1W / 1m) (LF / HF)
- 4” voice coil woofer
- 2.85” voice coil compression driver
- Common ferrite magnet system design
- Demodulating rings in both LF and HF units
- Composite Titanium / Polyester HF diaphragm
- Weatherproof LF cone
- 60º coverage horn for HF dispersion control





TECHNICAL SPECIFICATIONS

Nominal diameter	300 mm	12 in
Rated impedance (LF/HF)		8 / 16 Ω
Minimum impedance (LF/HF)		6,2 / 12,2 Ω
Power capacity [1] (LF/HF)		400 / 80 W_{AES}
Program power [2] (LF/HF)		800 / 160 W
Sensitivity (LF/HF [3])	96 dB	1W / 1m @ Z_N
	105 dB	1W / 1m @ Z_N
Frequency range		40 - 20.000 Hz
Recom. HF crossover		1,5 kHz or higher (12 dB/oct min slope)
Voice coil diameter (LF/HF)	101,6 mm	4 in
	72,2 mm	2,87 in
Bl factor		19,8 N/A
Moving mass		0,066 kg
Voice coil length		16 mm
Air gap height		10 mm
X_{damage} (peak to peak)		51 mm

THIELE-SMALL PARAMETERS [4]

Resonant frequency, f_s	42 Hz
D.C. Voice coil resistance, R_e	6,6 Ω
Mechanical Quality Factor, Q_{ms}	7,2
Electrical Quality Factor, Q_{es}	0,26
Total Quality Factor, Q_{ts}	0,25
Equivalent Air Volume to C_{ms}, V_{as}	94 l
Mechanical Compliance, C_{ms}	220 μm / N
Mechanical Resistance, R_{ms}	2,4 kg / s
Efficiency, η_0	2,2 %
Effective Surface Area, S_d	0,055 m^2
Maximum Displacement, X_{max} [5]	6 mm
Displacement Volume, V_d	210 cm^3
Voice Coil Inductance, L_e	1,1 mH

Notes:

[1] The power capaticty is determined according to AES2-1984 (r2003) standard.

[2] Program power is defined as power capacity + 3 dB.

[3] Sensitivity was measured at 1m distance, on axis, with 1W input, averaged in the range 1 - 7 kHz

[4] T-S parameters are measured after an exercise period using a preconditioning power test. The measurements are carried out with a velocity-current laser transducer and will reflect the long term parameters (once the loudspeaker has been working for a short period of time).

[5] The X_{max} is calculated as $(L_{vc} - H_{ag})/2 + (H_{ag}/3{,}5)$, where L_{vc} is the voice coil length and H_{ag} is the air gap height.

Acústica Beyma SL - P.I. Moncada II, C/ Pont Sec, 1C - 46113 Moncada, Valencia (Spain) - Tel. +34 96 130 13 75 - beyma@beyma.com


beyma

PROFESSIONAL LOUDSPEAKERS

www.beyma.com


12CXA400Fe

COAXIAL TRANSDUCER

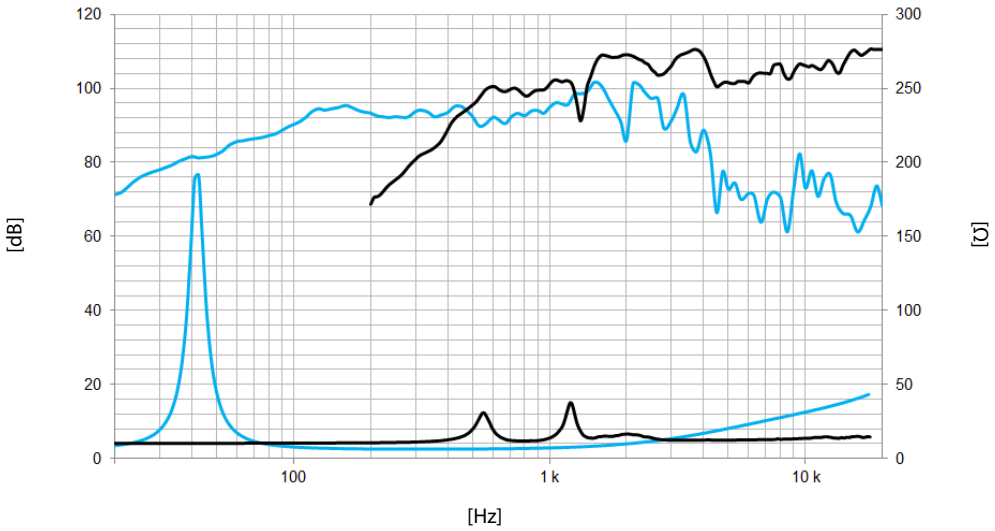


Note: Frequency response measured with loudspeaker standing on infinite baffle in anechoic chamber, 1W @ 1m

FILTERED FREQUENCY RESPONSE

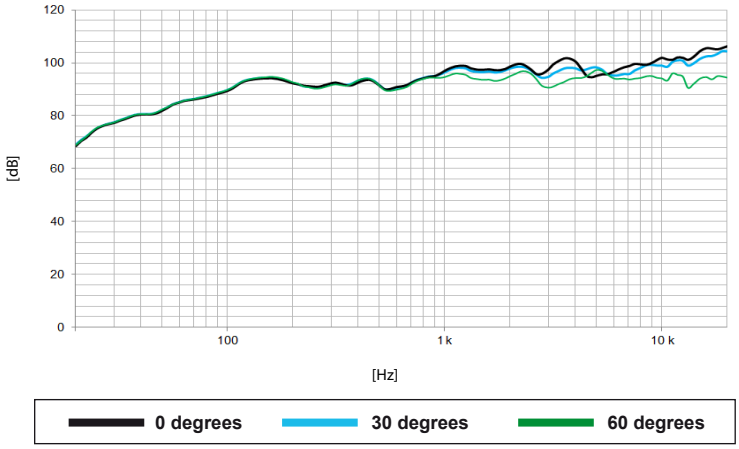

Note: Filtered frequency response measured with loudspeaker standing on infinite baffle in anechoic chamber, 1W @ 1m using filter FD-2XA


POLAR PATTERN

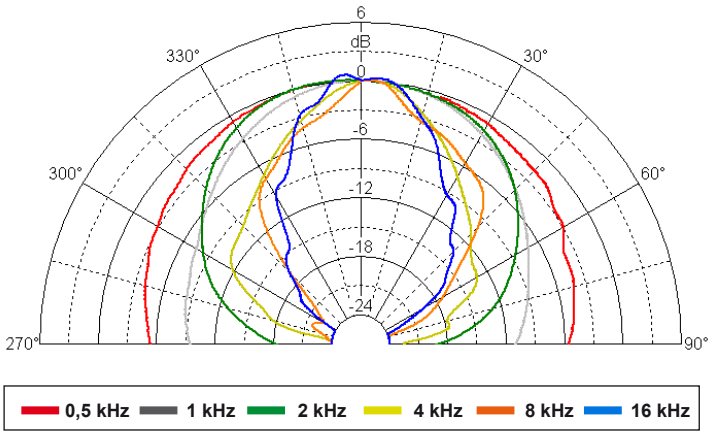

MOUNTING INFORMATION

Overall diameter	312 mm	12,3 in
Bolt circle diameter	298 mm	11,7 in
Baffle cutout diameter:		
- Front mount	283 mm	11,1 in
Depth	165 mm	6,5 in
Net weight	11,3 kg	24,9 lb
Shipping weight	11,7 kg	25,8 lb

DIMENSION DRAWING

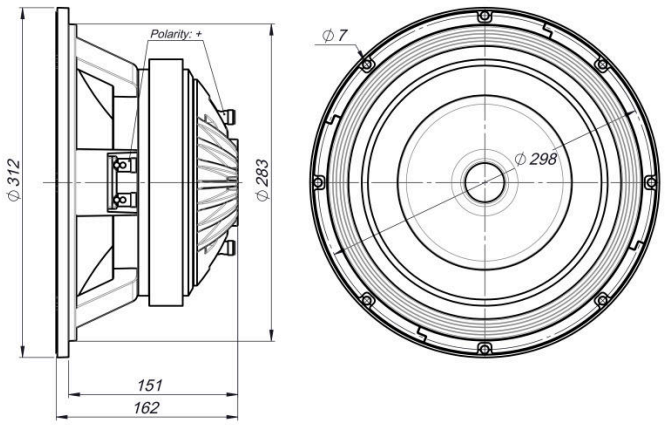

Acústica Beyma SL - P.I. Moncada II, C/ Pont Sec, 1C - 46113 Moncada, Valencia (Spain) - Tel. +34 96 130 13 75 - beyma@beyma.com

07/22