15NW76 8 Ω

Woofer

- 1200 W continuous program power capacity
- 76 mm (3 in) copper voice coil
- 40 - 2000 Hz response
- 100.5 dB sensitivity
- Aluminium demodulating ring allows a very low distortion figure
- Neodymium ring magnet assembly
- Double silicone spider and ventilated voice coil gap





B&C Speakers S.p.A. Via Poggiomoro, 1 - Loc. Vallina, 50012 Bagno a Ripoli (FI) | ITALY
Tel. +39 055 65721 | Fax +39 055 6572312 | mail@bcspeakers.com

15NW76 8 Ω

Woofer

SPECIFICATIONS

Nominal Diameter	**380 mm (15 in)**
Nominal Impedance	**8 Ω**
Minimum Impedance	**6.9 Ω**
Nominal Power Handling 2 hours test made with continuous pink noise signal within the range Fs-10Fs. Power calculated on rated minumum impedance. Loudspeaker in free air.	**600 W**
Continuous Power Handling Power on Continuous Program is defined as 3 dB greater than the Nominal rating.	**1200 W**
Sensitivity Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.	**100.5 dB**
Frequency Range	**40 Hz - 2000 Hz**
Voice Coil Diameter	**76 mm (3 in)**
Winding Material	**Copper**
Former Material	**Glass Fibre**
Winding Depth	**19 mm (0.75 in)**
Magnetic Gap Depth	**11 mm (0.43 in)**
Flux Density	**1.3 T**
Woofer Cone Treatment	**TWP Waterproof Both Sides**

PARAMETERS

Thiele-Small parameters are measured after a high level 20 Hz sine wave preconditioning test.

Fs	**42 Hz**
Re	**5.3 Ω**
Qes	**0.23**
Qms	**4.3**
Qts	**0.22**
Vas	**130 dm³ (4.5 ft³)**
Sd	**855 cm² (132.5 in²)**
η0	**4.4 %**
Xmax	**8 mm**
Xvar	**10 mm**
Mms	**104 g**
Bl	**25.5 Tm**
Le	**1.25 mH**
EBP	**183 Hz**

DESIGN

Surround Shape	**Triple Roll**
Cone Shape	**Exponential**
Magnet Material	**Neodymium Ring**
Spider	**Double Silicone**
Pole Design	**T-Pole**
Woofer Cone Treatment	**TWP Waterproof Both Sides**
Recommended Enclosure	**90 dm³ (3.18 ft³)**
Recommended Tuning	**53 Hz**

MOUNTING AND SHIPPING INFO

Overall Diameter	**393 mm (15.5 in)**
Bolt Circle Diameter	**374 mm (14.7 in)**
Baffle Cutout Diameter	**354 mm (13.9 in)**
Depth	**177 mm (7 in)**
Flange and Gasket Thickness	**16 mm (0.62 in)**
Air Volume Occupied by Driver	**3.7 dm³ (0.13 ft³)**
Net Weight	**5.6 kg (12.3 lb)**
Shipping Units	**1 pcs**
Shipping Weight	**6.9 kg (15.21 lb)**
Shipping Box	**425x425x224 mm (16.73x16.73x8.82 in)**


SERVICE KITS


LF recone-kits	**RCK15NW768**

B&C Speakers S.p.A. Via Poggiomoro, 1 - Loc. Vallina, 50012 Bagno a Ripoli (FI) | ITALY
Tel. +39 055 65721 | Fax +39 055 6572312 | mail@bcspeakers.com

15NW76 8 Ω


Woofer

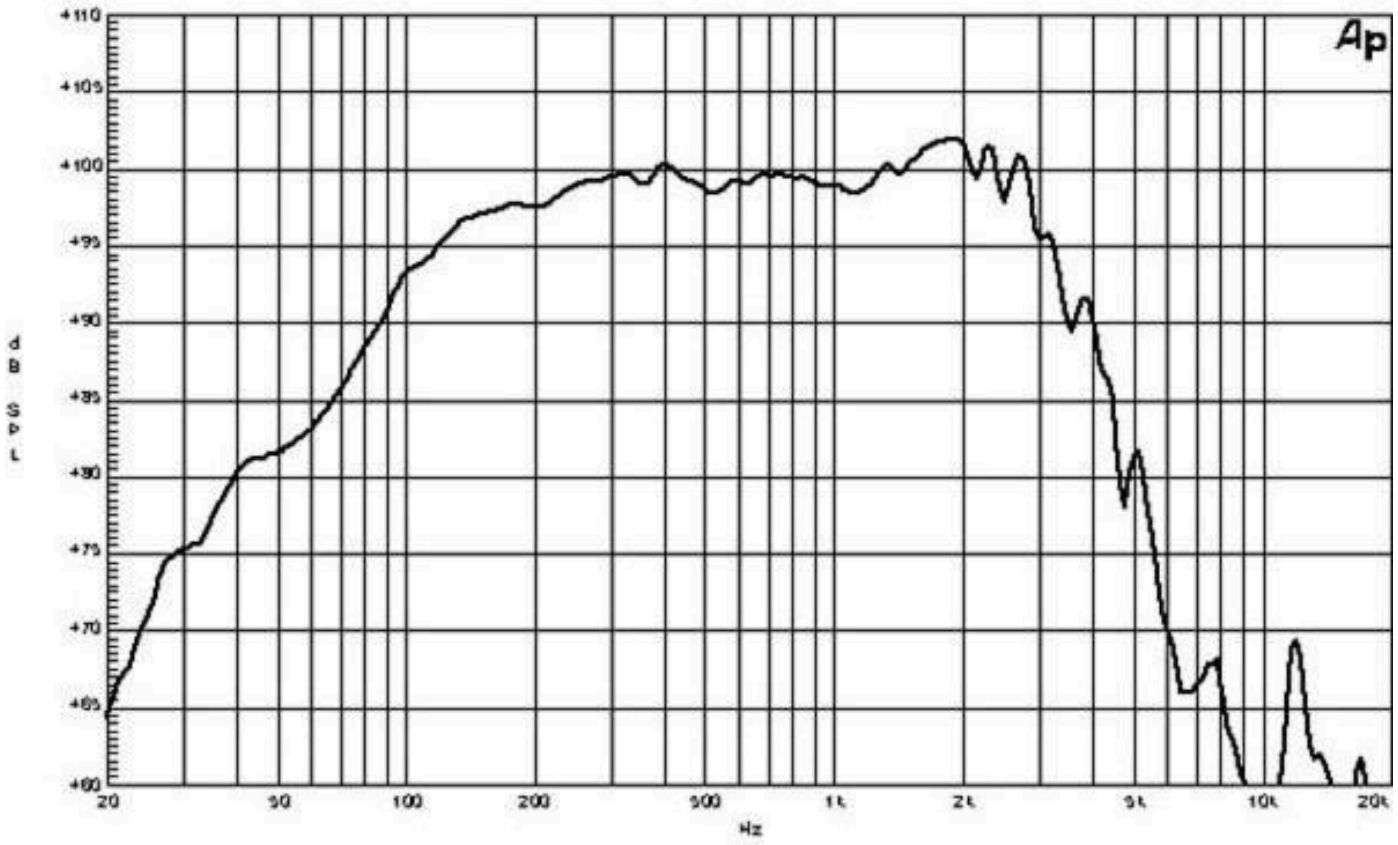

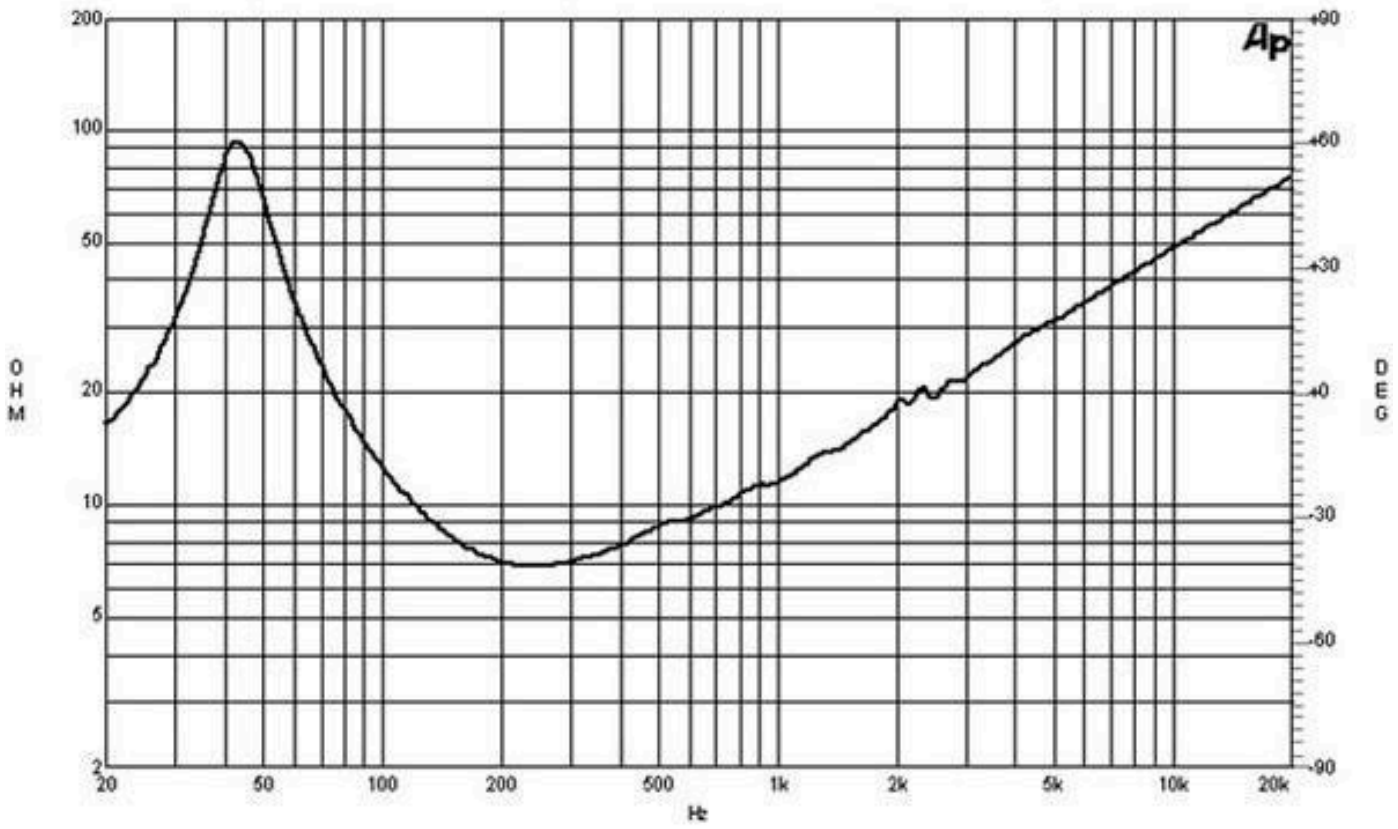

15NW76 8 Ω

Woofer

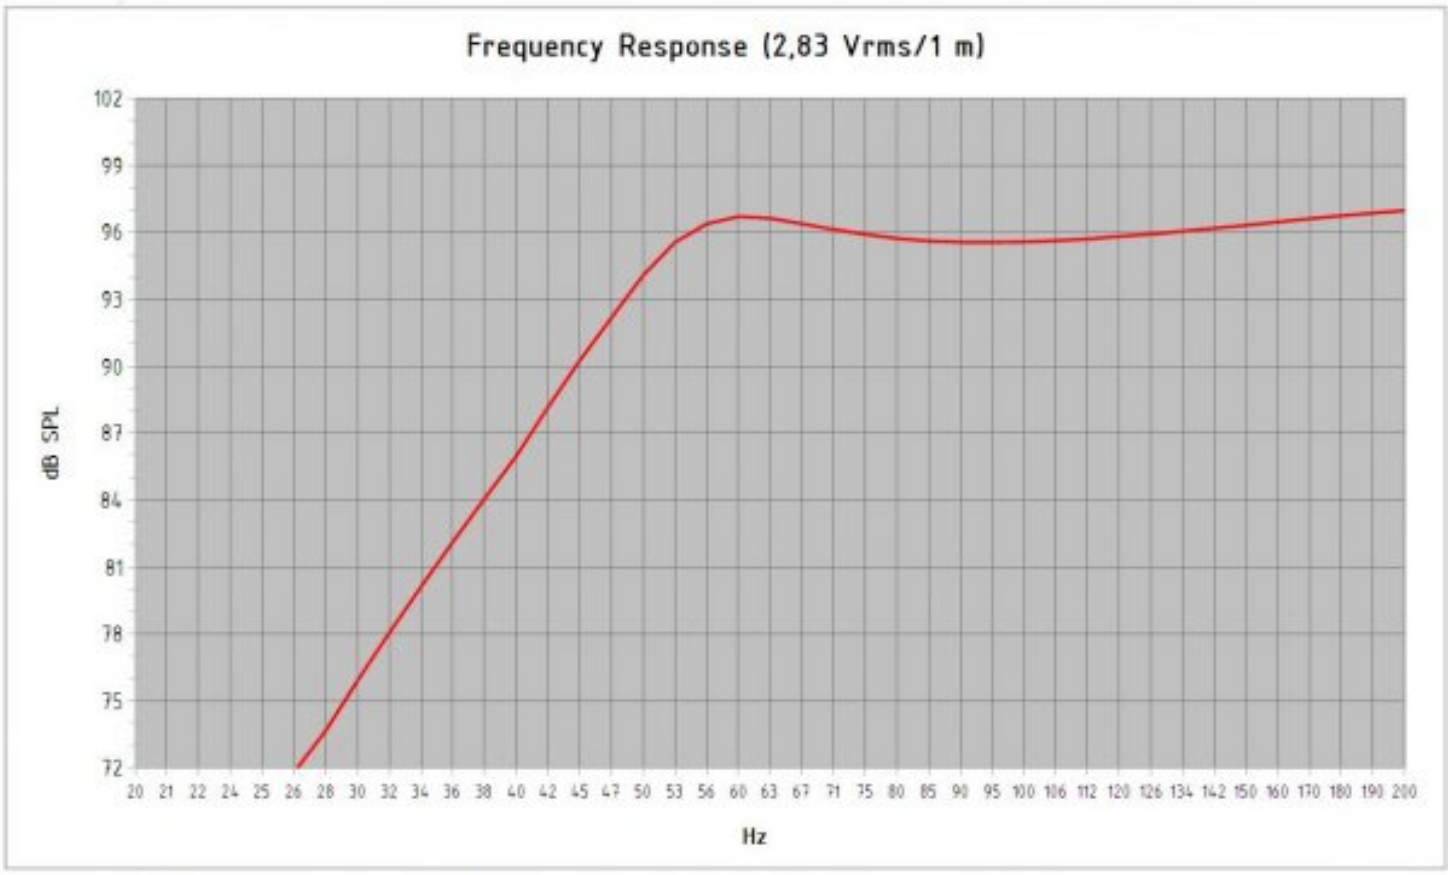


Model:	***15 NW 76***			
Enclosure Type:	***Bass Reflex***			
Internal Net Volume (Liters):	***90***			
Tuning Frequency (Hz):	***53***	*Port Area (cm²):*	***222,3***	
Frequency (-3 dB) (Hz):	***52,9***	*Port Length (cm):*	***11,7***	


Excursion Limited Maximum SPL at 1 meter (dB):	***124,8***	*equal to*	***494,9***	*Watts*	*(Bass Band Power Rating)*
Thermal Limited Maximum SPL at 1 meter (dB):	***125,6***	*equal to*	***600,0***	*Watts*	*(Mid Band Power Rating)*

B&C Speakers S.p.A. Via Poggiomoro, 1 - Loc. Vallina, 50012 Bagno a Ripoli (FI) | ITALY
Tel. +39 055 65721 | Fax +39 055 6572312 | mail@bcspeakers.com

15NW76 8 Ω

Woofer

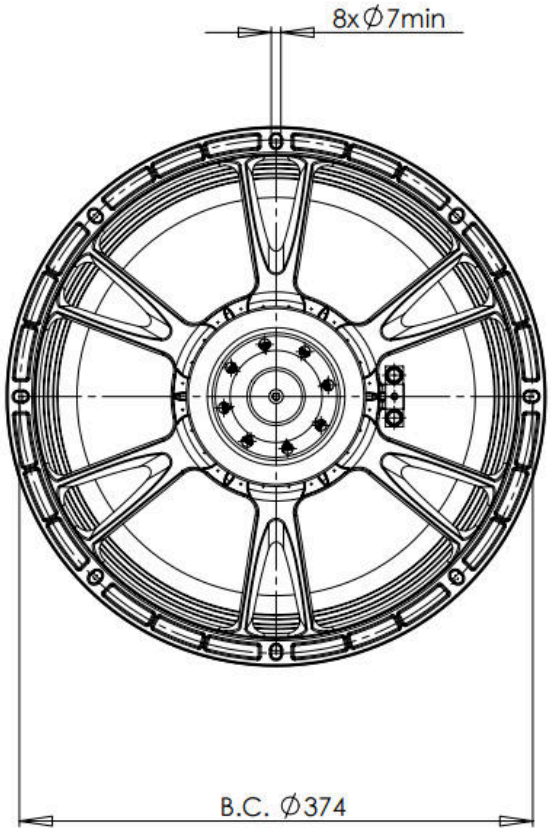

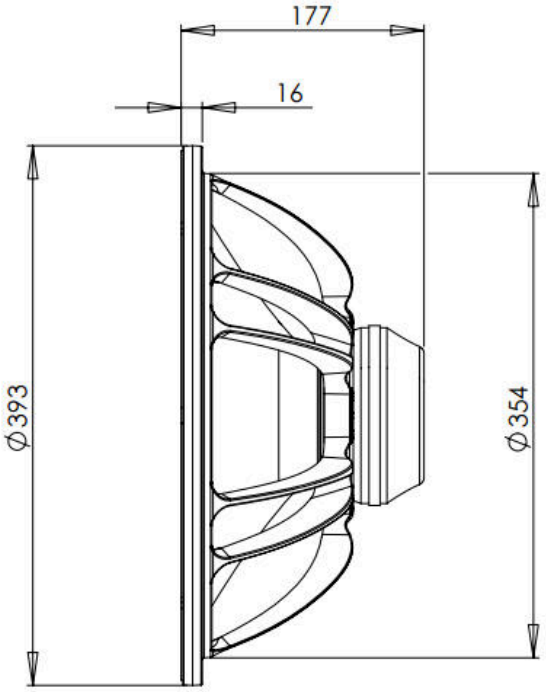

B&C Speakers S.p.A. Via Poggiomoro, 1 - Loc. Vallina, 50012 Bagno a Ripoli (FI) | ITALY
Tel. +39 055 65721 | Fax +39 055 6572312 | mail@bcspeakers.com