15TBW100 8 Ω

Subwoofer

- 3000 W continuous program power capacity
- 100 mm (4 in) split winding copper voice coil
- 40 - 1500 Hz response
- 96 dB sensitivity
- Excursion optimized lead wires (woven through spider)
- Double silicone spider with optimized compliance
- Ventilated voice coil gap for reduced power compression
- Aluminium demodulating ring for very low distortion





B&C Speakers S.p.A. Via Poggiomoro, 1 - Loc. Vallina, 50012 Bagno a Ripoli (FI) | ITALY
Tel. +39 055 65721 | Fax +39 055 6572312 | mail@bcspeakers.com

15TBW100 8 Ω

Subwoofer

SPECIFICATIONS

Nominal Diameter	**380 mm (15 in)**
Nominal Impedance	**8 Ω**
Minimum Impedance	**6.7 Ω**
Nominal Power Handling 2 hours test made with continuous pink noise signal within the range Fs-10Fs. Power calculated on rated minumum impedance. Loudspeaker in free air.	**1500 W**
Continuous Power Handling Power on Continuous Program is defined as 3 dB greater than the Nominal rating.	**3000 W**
Sensitivity Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.	**96 dB**
Frequency Range	**40 Hz - 1500 Hz**
Voice Coil Diameter	**100 mm (4 in)**
Winding Material	**Copper**
Former Material	**Glass Fibre**
Winding Depth	**31 mm (1.22 in)**
Magnetic Gap Depth	**15 mm (0.59 in)**
Flux Density	**1.15 T**
Woofer Cone Treatment	**TWP Waterproof Both Sides**

PARAMETERS

Thiele-Small parameters are measured after a high level 20 Hz sine wave preconditioning test.

Fs	**39 Hz**
Re	**5.3 Ω**
Qes	**0.33**
Qms	**4.4**
Qts	**0.31**
Vas	**96 dm³ (3.39 ft³)**
Sd	**855 cm² (132.5 in²)**
η0	**1.6 %**
Xmax	**12 mm**
Xvar	**13.5 mm**
Mms	**181 g**
Bl	**26.4 Tm**
Le	**2.2 mH**
EBP	**118 Hz**

DESIGN

Surround Shape	**Triple Roll**
Cone Shape	**Radial**
Magnet Material	**Ferrite**
Spider	**Double Silicone**
Pole Design	**T-Pole**
Woofer Cone Treatment	**TWP Waterproof Both Sides**
Recommended Enclosure	**95 dm³ (3.35 ft³)**
Recommended Tuning	**40 Hz**

MOUNTING AND SHIPPING INFO

Overall Diameter	**393 mm (15.5 in)**
Bolt Circle Diameter	**374 mm (14.7 in)**
Baffle Cutout Diameter	**354 mm (13.9 in)**
Depth	**191 mm (7.52 in)**
Flange and Gasket Thickness	**14 mm (0.55 in)**
Air Volume Occupied by Driver	**6 dm³ (0.21 ft³)**
Net Weight	**12.2 kg (26.9 lb)**
Shipping Units	**1 pcs**
Shipping Weight	**13.5 kg (29.76 lb)**
Shipping Box	**425x425x224 mm (16.73x16.73x8.82 in)**


SERVICE KITS


LF recone-kits	**RCK15TBW1008**

B&C Speakers S.p.A. Via Poggiomoro, 1 - Loc. Vallina, 50012 Bagno a Ripoli (FI) | ITALY
Tel. +39 055 65721 | Fax +39 055 6572312 | mail@bcspeakers.com

15TBW100 8 Ω


Subwoofer

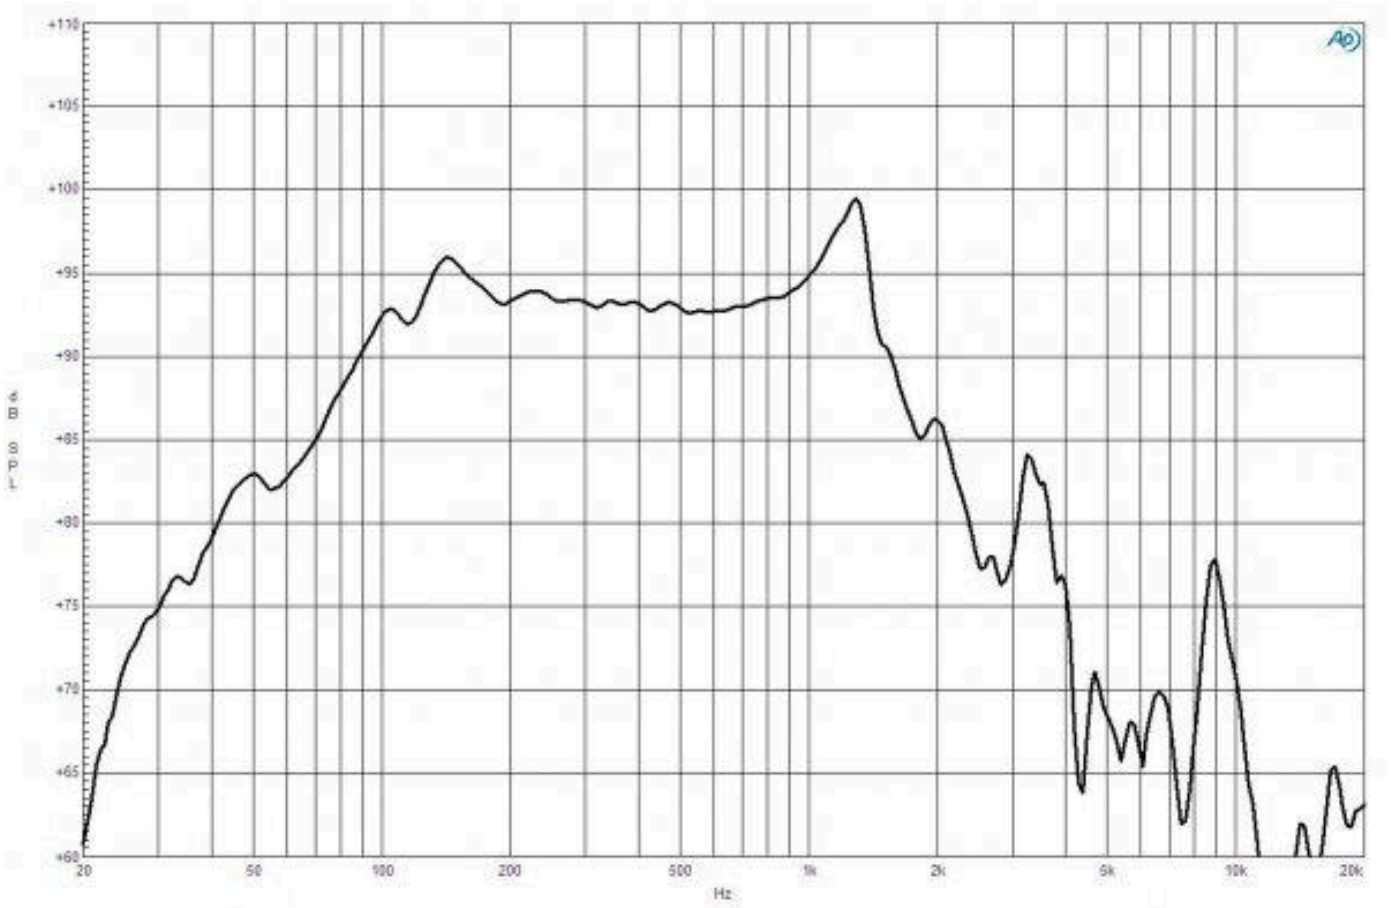

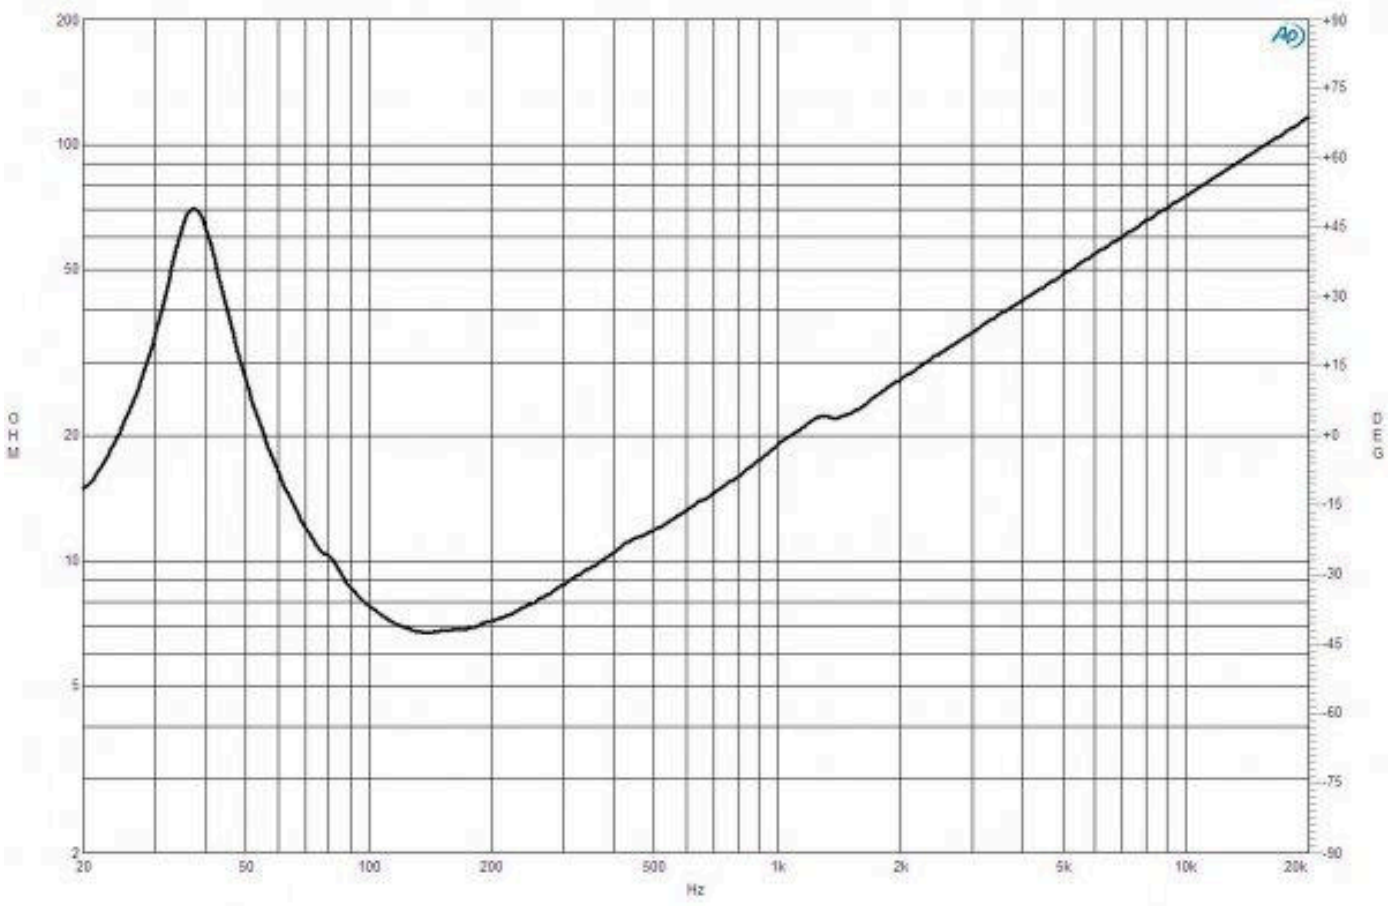

15TBW100 8 Ω

Subwoofer

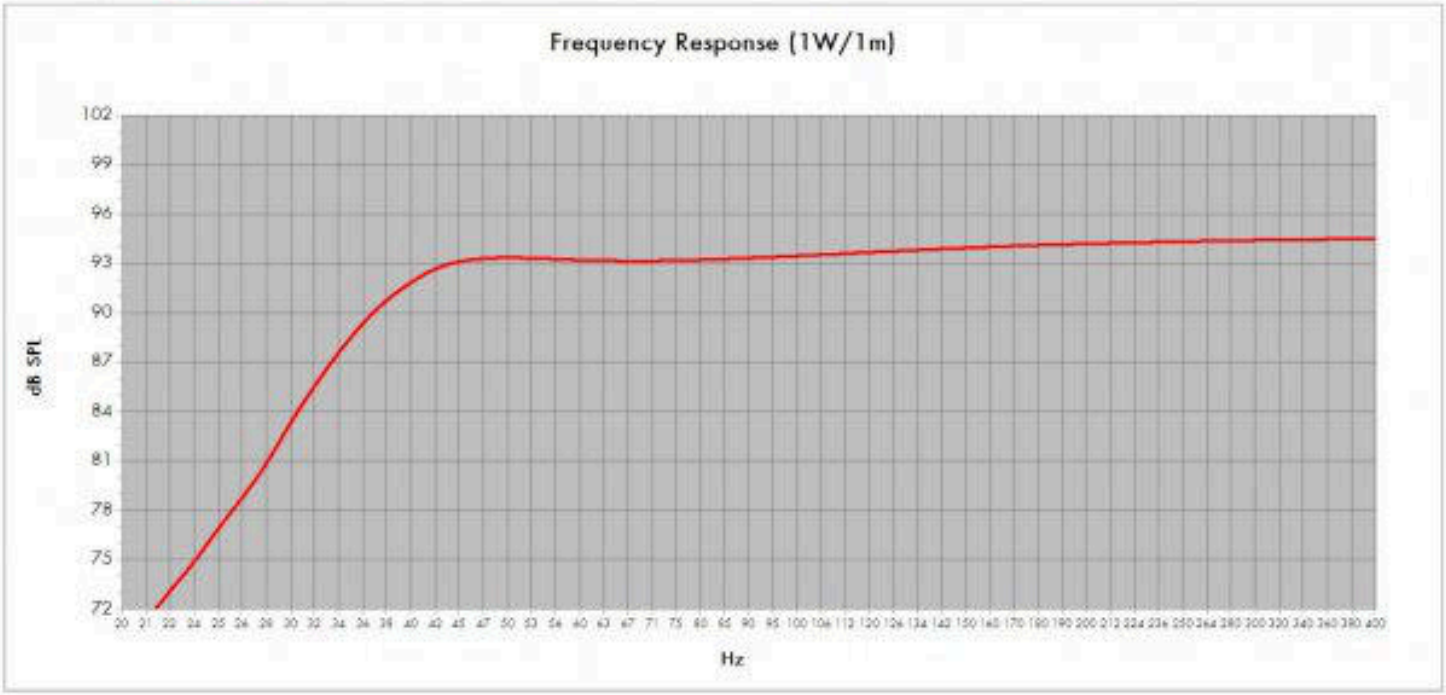


Model:	15TBW100		
Enclosure Type:	Bass Reflex	Configuration:	One Driver
Internal Net Volume (Litres):	95	QB:	7
Tuning Frequency (Hz):	40	Port Area (cm²):	277,5
Frequency (-3 dB) (Hz):	39,6	Port Length (cm):	38,6


Excursion Limited Maximum SPL at 1 meter (dB): 122,7 equal to 773,2 Watts (Bass Band Power Rating)
Thermal Limited Maximum SPL at 1 meter (dB): 126,3 equal to 1500,0 Watts (Mid Band Power Rating)

B&C Speakers S.p.A. Via Poggiomoro, 1 - Loc. Vallina, 50012 Bagno a Ripoli (FI) | ITALY
Tel. +39 055 65721 | Fax +39 055 6572312 | mail@bcspeakers.com

15TBW100 8 Ω

Subwoofer

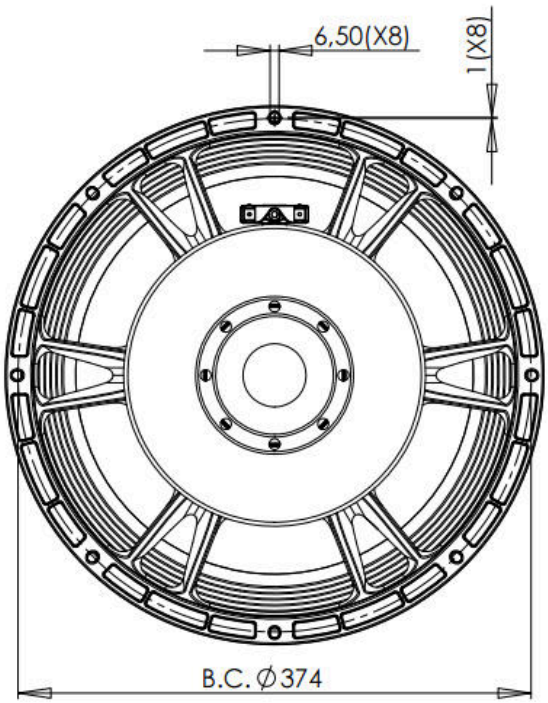

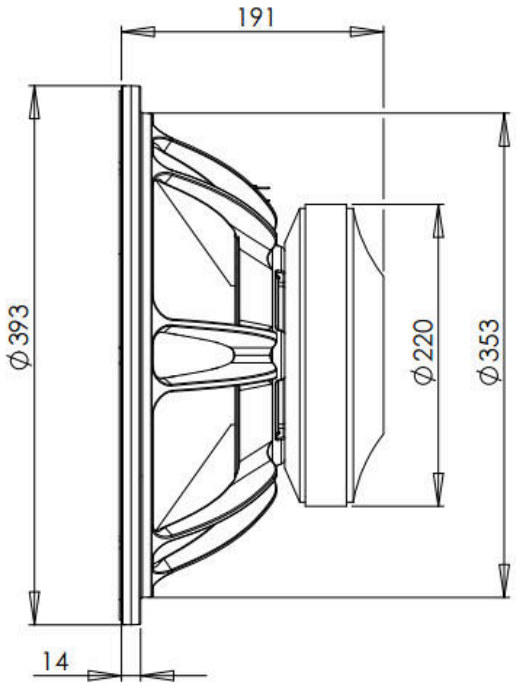

B&C Speakers S.p.A. Via Poggiomoro, 1 - Loc. Vallina, 50012 Bagno a Ripoli (FI) | ITALY
Tel. +39 055 65721 | Fax +39 055 6572312 | mail@bcspeakers.com