18TBW100 8 Ω

Subwoofer

- 3000 W continuous program power capacity
- 100 mm (4 in) split winding copper voice coil
- 35 - 1000 Hz response
- 96 dB sensitivity
- Excursion optimized lead wires (woven through spider)
- Double silicone spider with optimized compliance
- Ventilated voice coil gap for reduced power compression
- Aluminium demodulating ring for very low distortion





B&C Speakers S.p.A. Via Poggiomoro, 1 - Loc. Vallina, 50012 Bagno a Ripoli (FI) | ITALY
Tel. +39 055 65721 | Fax +39 055 6572312 | mail@bcspeakers.com

18TBW100 8 Ω

Subwoofer

SPECIFICATIONS

Nominal Diameter	**460 mm (18 in)**
Nominal Impedance	**8 Ω**
Minimum Impedance	**6.5 Ω**
Nominal Power Handling 2 hours test made with continuous pink noise signal within the range Fs-10Fs. Power calculated on rated minumum impedance. Loudspeaker in free air.	**1500 W**
Continuous Power Handling Power on Continuous Program is defined as 3 dB greater than the Nominal rating.	**3000 W**
Sensitivity Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.	**96 dB**
Frequency Range	**35 Hz - 1000 Hz**
Voice Coil Diameter	**100 mm (4 in)**
Winding Material	**Copper**
Former Material	**Glass Fibre**
Winding Depth	**31 mm (1.22 in)**
Magnetic Gap Depth	**15 mm (0.59 in)**
Flux Density	**1.15 T**
Woofer Cone Treatment	**TWP Waterproof Both Sides**

PARAMETERS

Thiele-Small parameters are measured after a high level 20 Hz sine wave preconditioning test.

Fs	**35 Hz**
Re	**5.3 Ω**
Qes	**0.41**
Qms	**8**
Qts	**0.39**
Vas	**175 dm³ (6.18 ft³)**
Sd	**1210 cm² (187.6 in²)**
η0	**1.76 %**
Xmax	**12 mm**
Xvar	**14 mm**
Mms	**245 g**
Bl	**26.4 Tm**
Le	**2.45 mH**
EBP	**85 Hz**

DESIGN

Surround Shape	**Triple Roll**
Cone Shape	**Radial**
Magnet Material	**Ferrite**
Spider	**Double Silicone**
Pole Design	**T-Pole**
Woofer Cone Treatment	**TWP Waterproof Both Sides**
Recommended Enclosure	**200 dm³ (7.06 ft³)**
Recommended Tuning	**32 Hz**

MOUNTING AND SHIPPING INFO

Overall Diameter	**460 mm (18 in)**
Bolt Circle Diameter	**442 mm (17.4 in)**
Baffle Cutout Diameter	**425 mm (16.73 in)**
Depth	**241 mm (9.5 in)**
Flange and Gasket Thickness	**16 mm (0.63 in)**
Air Volume Occupied by Driver	**11 dm³ (0.39 ft³)**
Net Weight	**15.4 kg (33.95 lb)**
Shipping Units	**1 pcs**
Shipping Weight	**17 kg (37.48 lb)**
Shipping Box	**500x495x275 mm (19.69x19.49x10.83 in)**


SERVICE KITS


LF recone-kits	**RCK18TBW1008**

B&C Speakers S.p.A. Via Poggiomoro, 1 - Loc. Vallina, 50012 Bagno a Ripoli (FI) | ITALY
Tel. +39 055 65721 | Fax +39 055 6572312 | mail@bcspeakers.com

18TBW100 8 Ω

Subwoofer

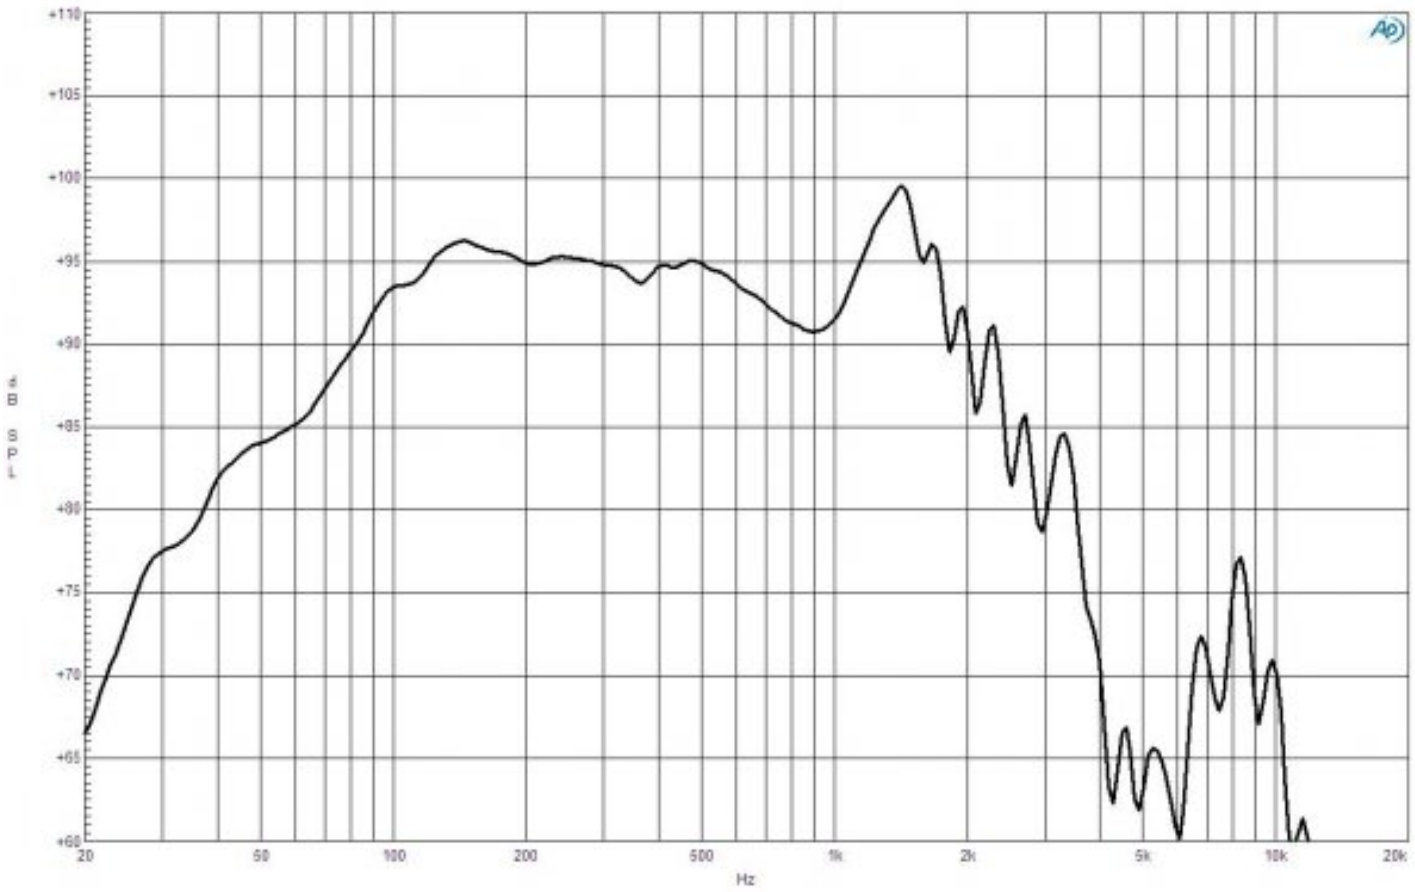


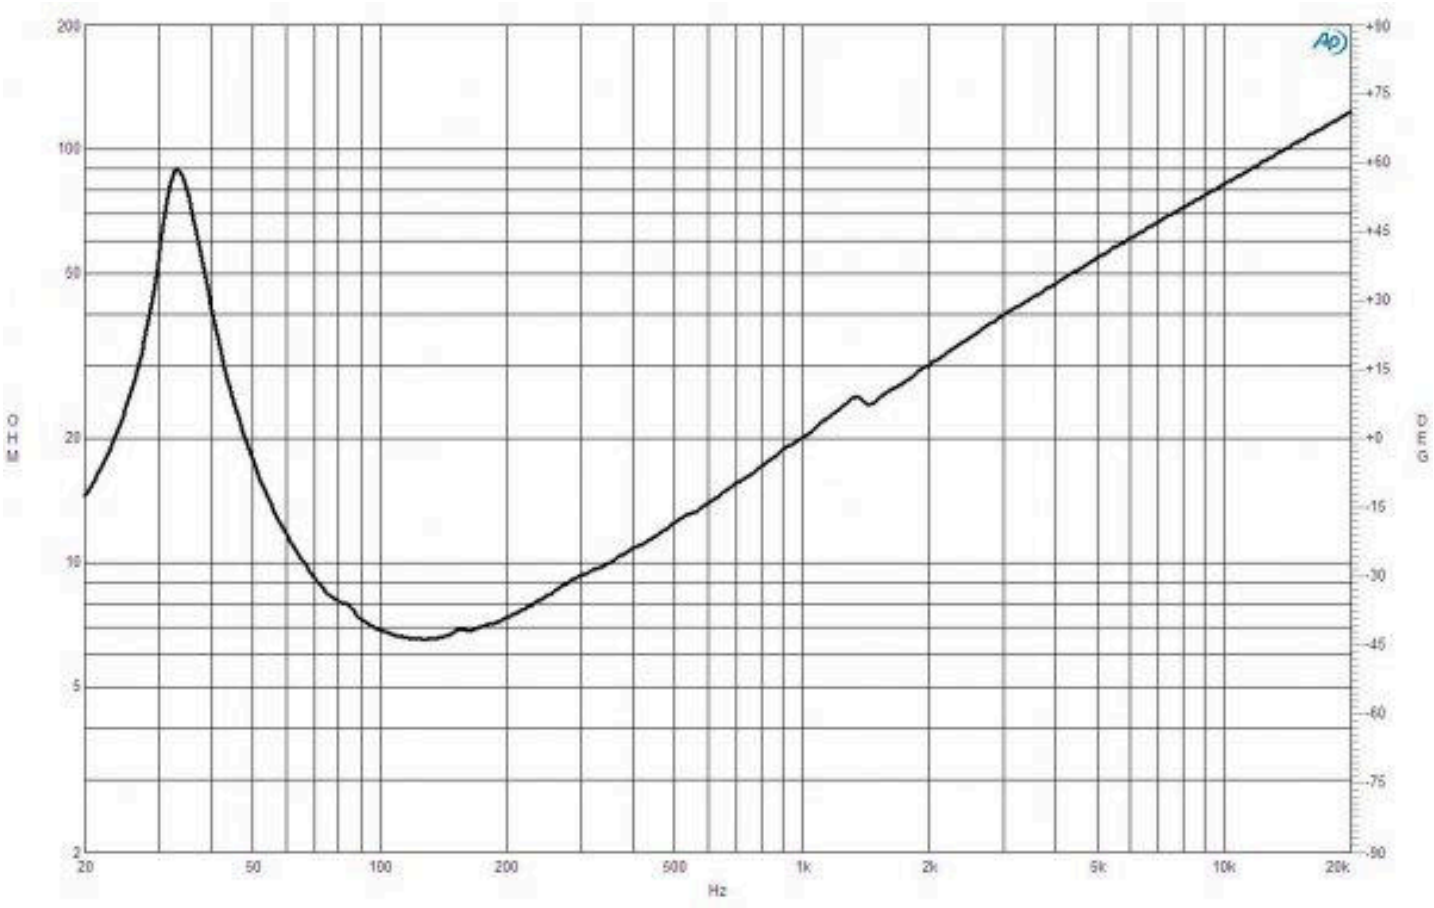

B&C Speakers S.p.A. Via Poggiomoro, 1 - Loc. Vallina, 50012 Bagno a Ripoli (FI) | ITALY
Tel. +39 055 65721 | Fax +39 055 6572312 | mail@bcspeakers.com

18TBW100 8 Ω

Subwoofer

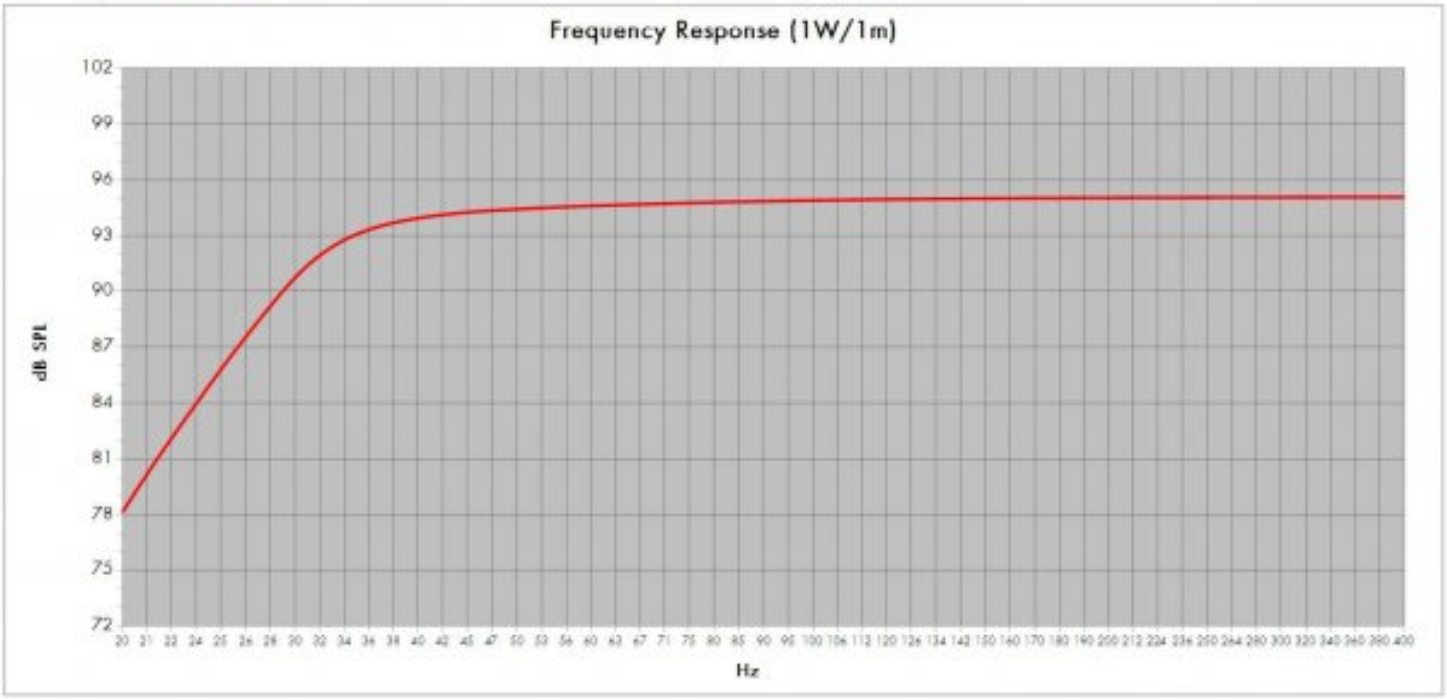

Model:	18TBW100		
Enclosure Type:	Bass Reflex	Configuration:	One Driver
Internal Net Volume (Litres):	200		
Tuning Frequency (Hz):	32	Port Area (cm²):	339,6
Frequency (-3 dB) (Hz):	32,2	Port Length (cm):	31,7

B&C Speakers S.p.A. Via Poggiomoro, 1 - Loc. Vallina, 50012 Bagno a Ripoli (FI) | ITALY
Tel. +39 055 65721 | Fax +39 055 6572312 | mail@bcspeakers.com

18TBW100 8 Ω

Subwoofer

