8MDN51 16 Ω

Mid-Bass

- 400 W continuous program power capacity
- 51 mm (2 in) aluminium voice coil
- 70 - 4000 Hz response
- 97 dB sensitivity
- Neodymium ring magnet assembly
- Ventilated voice coil gap for reduced power compression





B&C Speakers S.p.A. Via Poggiomoro, 1 - Loc. Vallina, 50012 Bagno a Ripoli (FI) | ITALY
Tel. +39 055 65721 | Fax +39 055 6572312 | mail@bcspeakers.com

8MDN51 16 Ω

Mid-Bass

SPECIFICATIONS

Nominal Diameter	**200 mm (8 in)**
Nominal Impedance	**16 Ω**
Minimum Impedance	**11.6 Ω**
Nominal Power Handling 2 hours test made with continuous pink noise signal within the range Fs-10Fs. Power calculated on rated minumum impedance. Loudspeaker in free air.	**200 W**
Continuous Power Handling Power on Continuous Program is defined as 3 dB greater than the Nominal rating.	**400 W**
Sensitivity Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.	**97 dB**
Frequency Range	**70 Hz - 4000 Hz**
Voice Coil Diameter	**51 mm (2 in)**
Winding Material	**Aluminium**
Former Material	**Kapton**
Winding Depth	**16 mm (0.65 in)**
Magnetic Gap Depth	**8 mm (0.31 in)**
Flux Density	**1.45 T**
Woofer Cone Treatment	**WP Waterproof Front Side**

PARAMETERS

Thiele-Small parameters are measured after a high level 20 Hz sine wave preconditioning test.

Fs	**68 Hz**
Re	**10 Ω**
Qes	**0.29**
Qms	**5.2**
Qts	**0.27**
Vas	**17.5 dm^3 (0.62 ft^3)**
Sd	**220 cm^2 (34.1 in^2)**
η0	**1.5 %**
Xmax	**6 mm**
Xvar	**6 mm**
Mms	**22 g**
Bl	**17.8 Tm**
Le	**1.25 mH**
EBP	**234 Hz**

DESIGN

Surround Shape	**Double Roll**
Cone Shape	**Exponential**
Magnet Material	**Neodymium Ring**
Spider	**Single**
Pole Design	**T-Pole**
Woofer Cone Treatment	**WP Waterproof Front Side**

MOUNTING AND SHIPPING INFO

Overall Diameter	**225 mm (8.8 in)**
Bolt Circle Diameter	**210 mm (8.3 in)**
Baffle Cutout Diameter	**187 mm (7.4 in)**
Depth	**95 mm (3.74 in)**
Flange and Gasket Thickness	**11 mm (0.4 in)**
Air Volume Occupied by Driver	**1.1 dm^3 (0.04 ft^3)**
Net Weight	**2.6 kg (5.73 lb)**
Shipping Units	**1 pcs**
Shipping Weight	**3.05 kg (6.72 lb)**
Shipping Box	**255x255x150 mm (10.04x10.04x5.91 in)**


SERVICE KITS


LF recone-kits	**RCK008MDN5116**

B&C Speakers S.p.A. Via Poggiomoro, 1 - Loc. Vallina, 50012 Bagno a Ripoli (FI) | ITALY
Tel. +39 055 65721 | Fax +39 055 6572312 | mail@bcspeakers.com

8MDN51 16 Ω

Mid-Bass

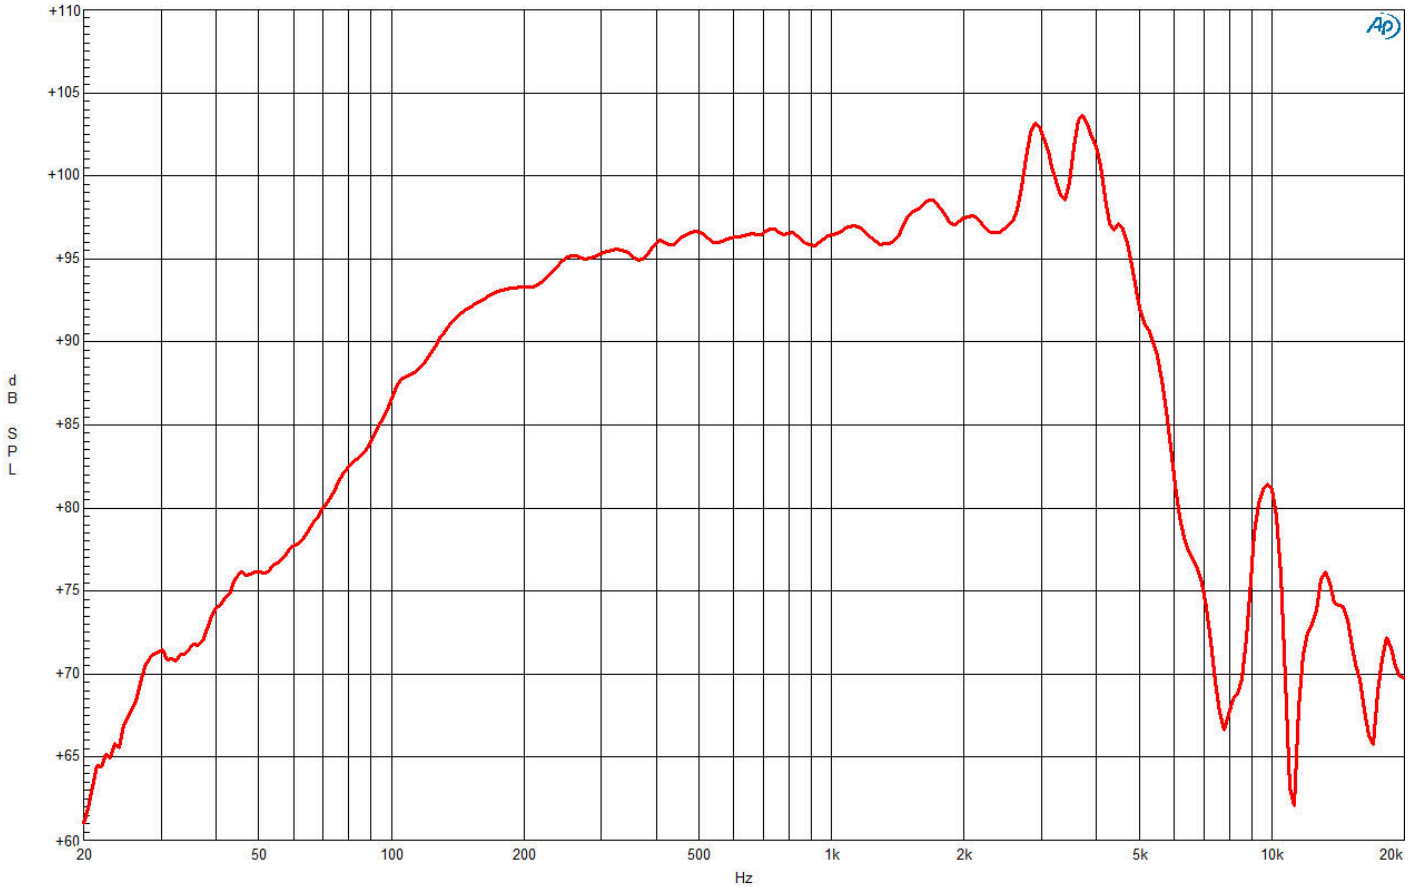


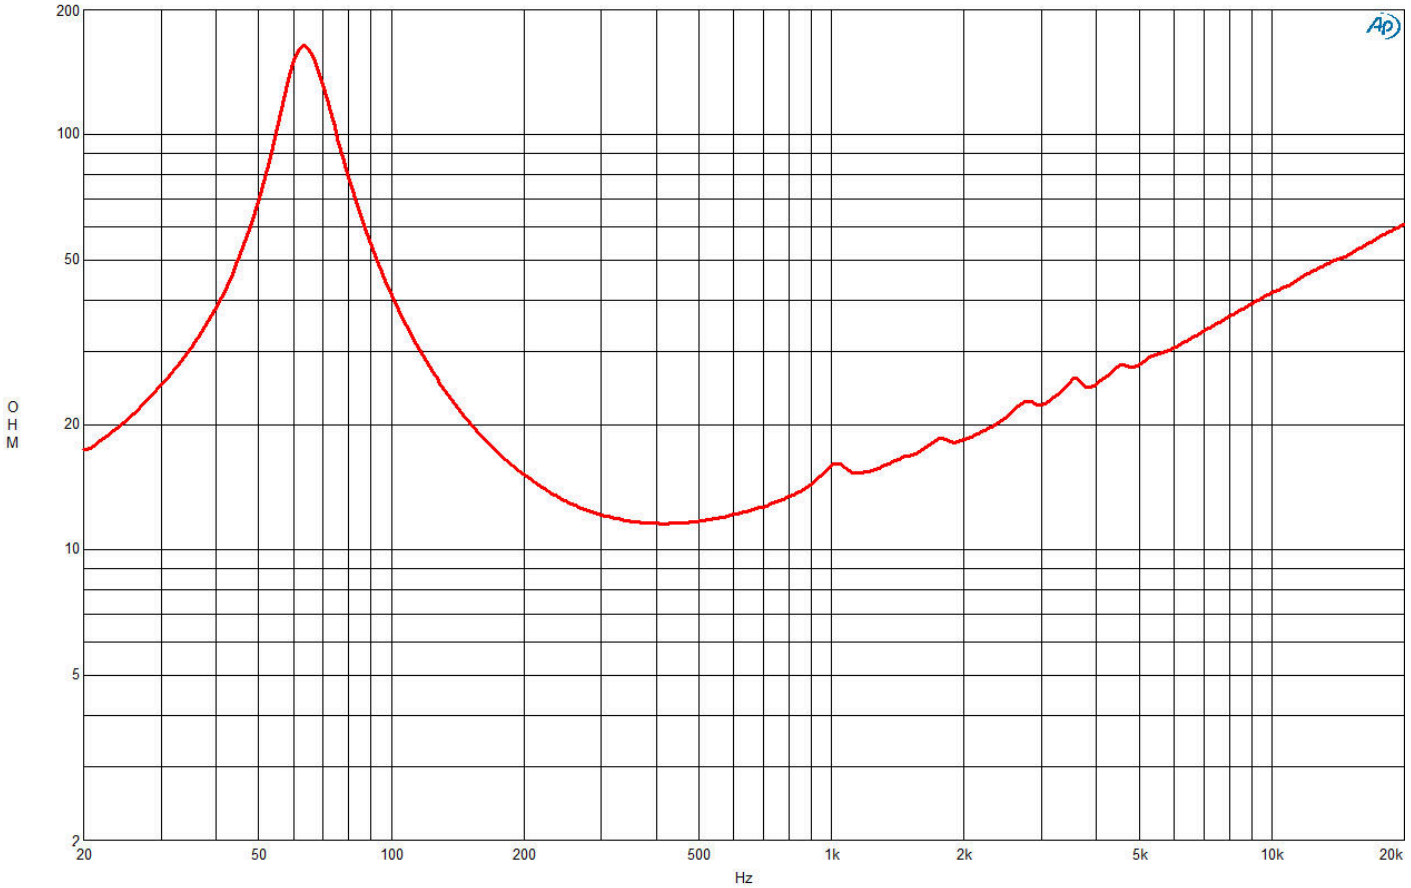


B&C Speakers S.p.A. Via Poggiomoro, 1 - Loc. Vallina, 50012 Bagno a Ripoli (FI) | ITALY
Tel. +39 055 65721 | Fax +39 055 6572312 | mail@bcspeakers.com

8MDN51 16 Ω

Mid-Bass

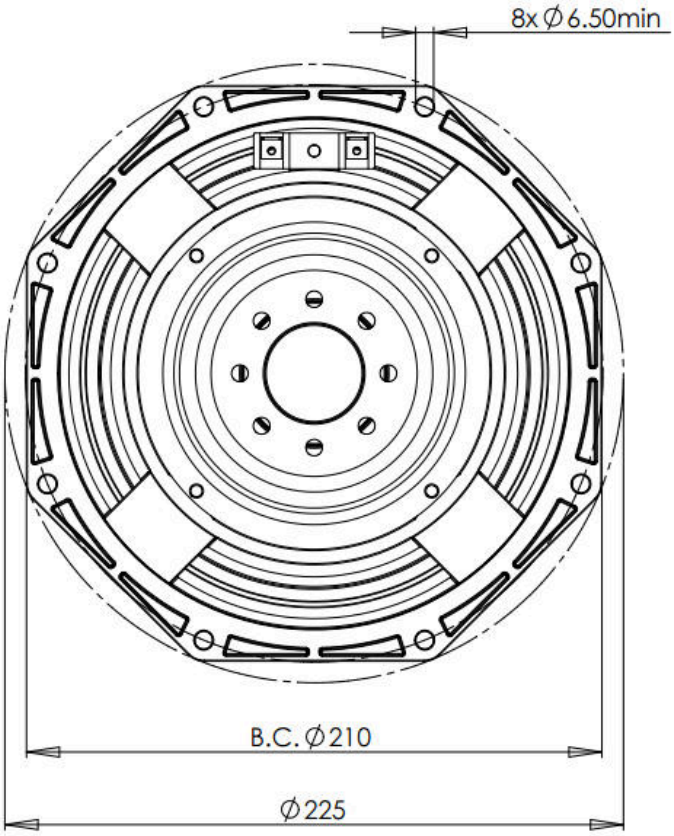

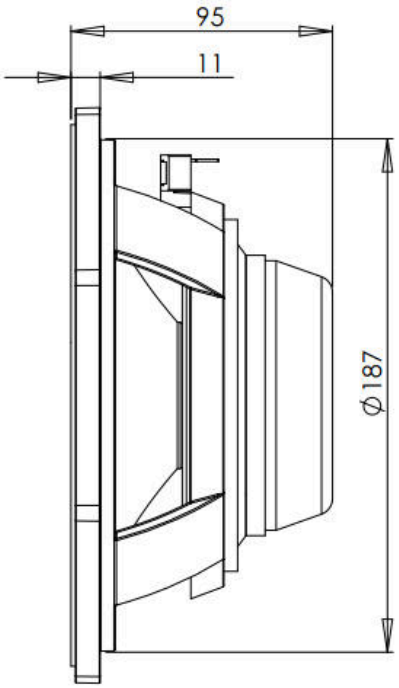

B&C Speakers S.p.A. Via Poggiomoro, 1 - Loc. Vallina, 50012 Bagno a Ripoli (FI) | ITALY
Tel. +39 055 65721 | Fax +39 055 6572312 | mail@bcspeakers.com