DE10 8 Ω

SPECIFICATIONS

Driver mounted on B&C ME 10 horn.

Throat Diameter	**25 mm (1 in)**
Nominal Impedance	**8 Ω**
Minimum Impedance	**6.3 Ω**
Nominal Power Handling 2 hour test made with continuous pink noise signal within the range from the recommended crossover frequency to 20 kHz. Power calculated on rated minimum impedance.	**20 W**
Continuous Power Handling Power on Continuous Program is defined as 3 dB greater than the Nominal rating.	**40 W**
Sensitivity Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.	**107 dB**
Frequency Range	**1.5 kHz - 18 kHz**
Recommended Crossover 12 dB/oct. or higher slope high-pass filter.	**2.5 kHz**
Voice Coil Diameter	**25 mm (1 in)**
Winding Material	**Aluminium**
Inductance	**0.1 mH**
Flux Density	**1.55 T**
Diaphragm Material	**Mylar**

MOUNTING AND SHIPPING INFO

Two M5 holes 180° on 76 mm (3 in) diameter

Overall Diameter	**90 mm (3.5 in)**
Depth	**53 mm (2.1 in)**
Net Weight	**0.8 kg (1.8 lb)**
Shipping Units	**1 pcs**
Shipping Weight	**0.83 kg (1.82 lb)**
Shipping Box	**105x105x65 mm (4.13x4.13x2.56 in)**

SERVICE KITS

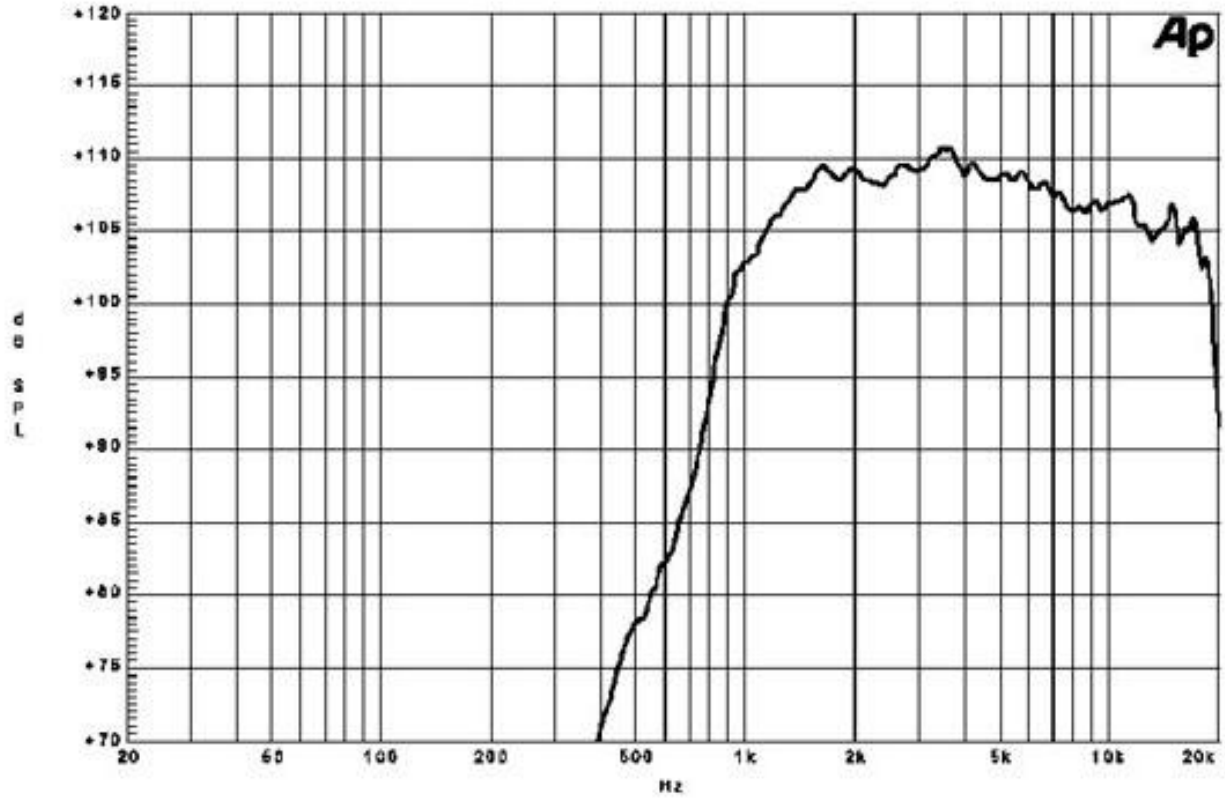
HF replacement-diaphragm	**MMD0108**

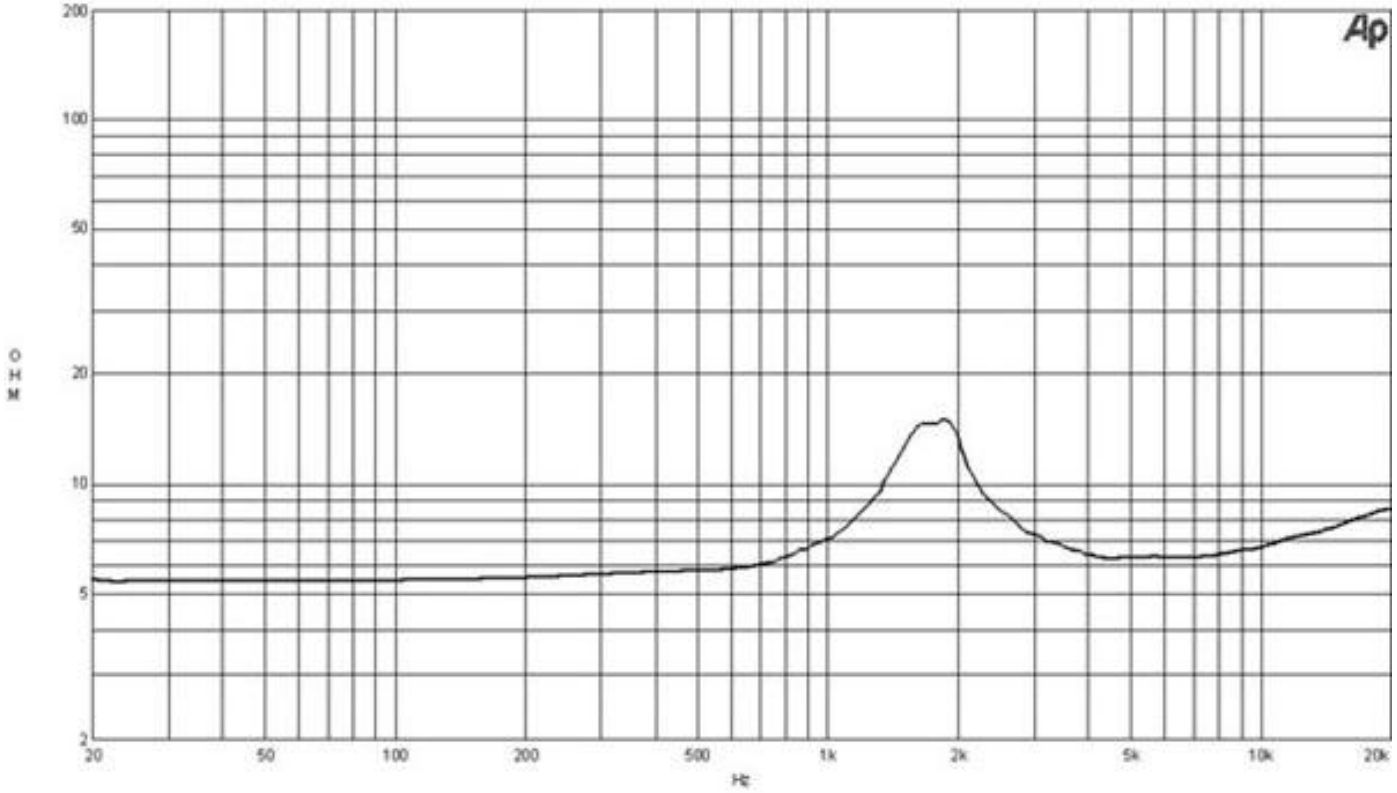
- 40 W continuous program power capacity
- 1" horn throat diameter
- 25 mm (1 in) aluminium voice coil
- Polyester diaphragm
- 1500 - 18000 Hz response
- 107 dB sensitivity



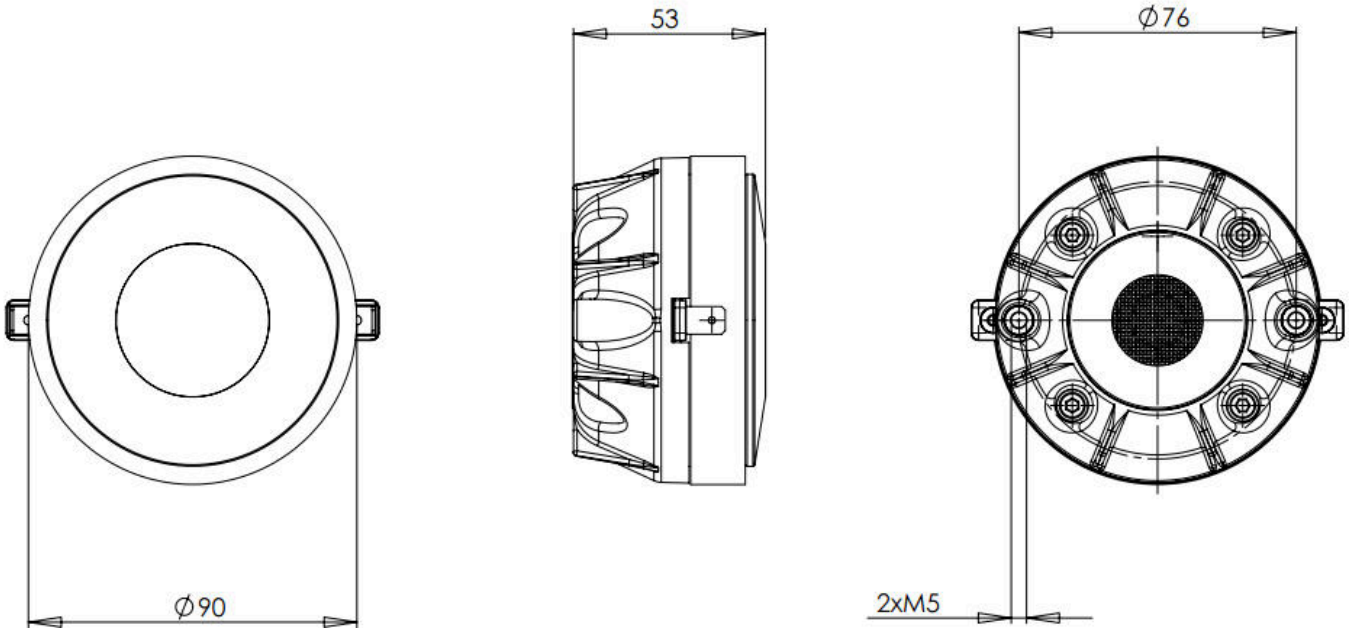
B&C Speakers S.p.A. Via Poggiomoro, 1 - Loc. Vallina, 50012 Bagno a Ripoli (FI) | ITALY
Tel. +39 055 65721 | Fax +39 055 6572312 | mail@bcspeakers.com

DE10 8 Ω


+120
+115
+110
+105
+100
+95
+90
+85
+80
+75
+70
dB SPL
20
50
100
200
500
1k
2k
5k
10k
20k
Hz


200
100
50
20
10
5
2
OHM
20
50
100
200
500
1k
2k
5k
10k
20k
Hz

DE10 8 Ω



B&C Speakers S.p.A. Via Poggiomoro, 1 - Loc. Vallina, 50012 Bagno a Ripoli (FI) | ITALY
Tel. +39 055 65721 | Fax +39 055 6572312 | mail@bcspeakers.com