DE1095TN 8 Ω

SPECIFICATIONS

Driver mounted on B&C LAB exponential horn.

Throat Diameter	**50 mm (2 in)**
Nominal Impedance	**8 Ω**
Minimum Impedance	**8.3 Ω**
Nominal Power Handling 2 hour test made with continuous pink noise signal within the range from the recommended crossover frequency to 20 kHz. Power calculated on rated minimum impedance.	**120 W**
Continuous Power Handling Power on Continuous Program is defined as 3 dB greater than the Nominal rating.	**240 W**
Sensitivity Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.	**108 dB**
Frequency Range	**0.5 kHz - 20 kHz**
Recommended Crossover 12 dB/oct. or higher slope high-pass filter.	**0.8 kHz**
Voice Coil Diameter	**100 mm (4 in)**
Winding Material	**Aluminium**
Inductance	**0.18 mH**
Flux Density	**1.9 T**
Diaphragm Material	**Titanium**

MOUNTING AND SHIPPING INFO

Four M6 holes 90° on 102 mm (4 in) diameter

Overall Diameter	**127 mm (5 in)**
Depth	**89 mm (3.5 in)**
Net Weight	**2.14 kg (4.71 lb)**
Shipping Units	**1 pcs**
Shipping Weight	**2.4 kg (5.28 lb)**
Shipping Box	**190x190x120 mm (7.48x7.48x4.72 in)**

SERVICE KITS

HF replacement-diaphragm	**MMD4CTN8M**

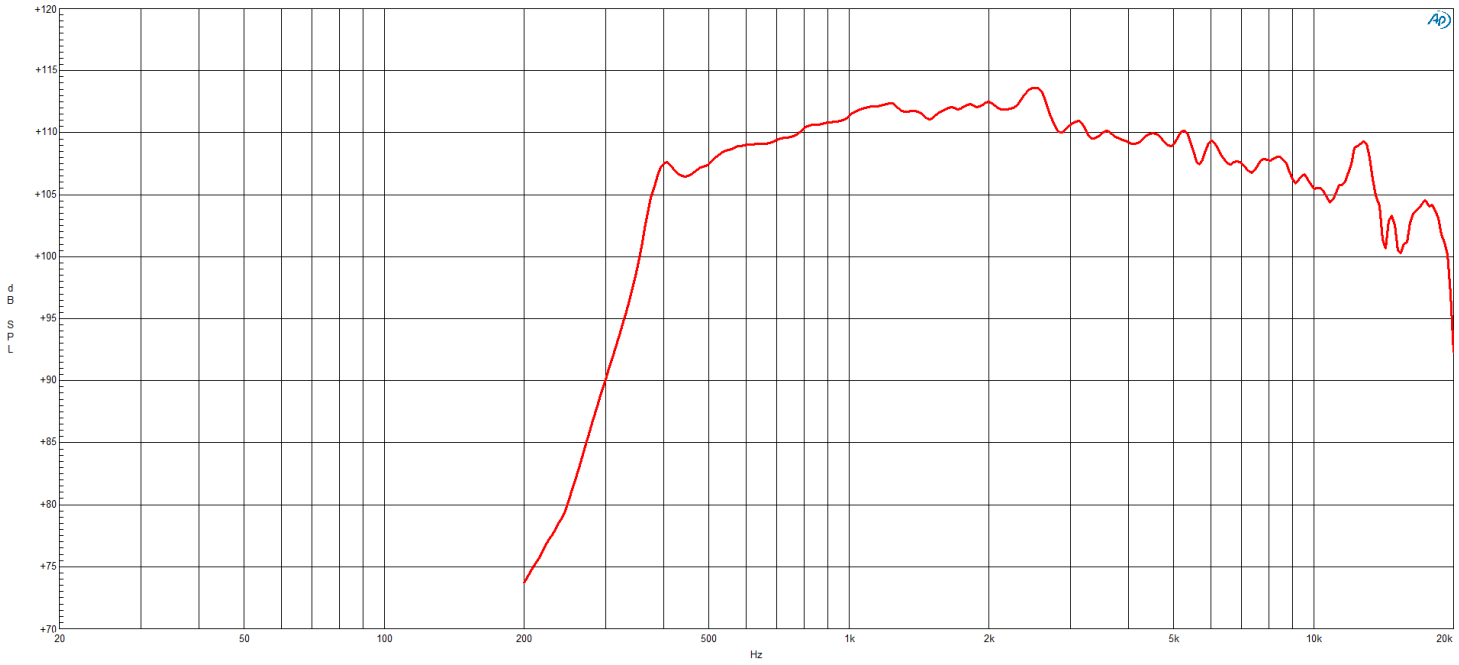


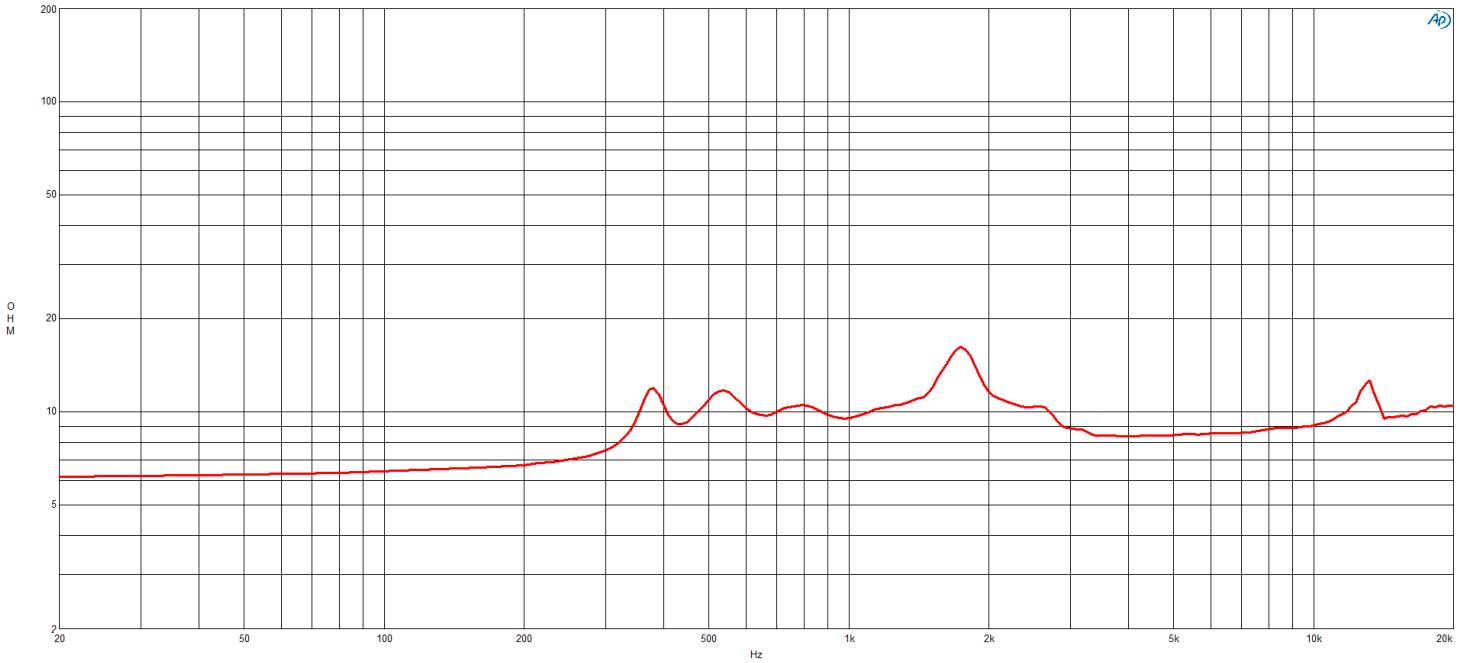
- 2" horn throat diameter
- 240 W continuous program power capacity
- 100 mm (4 in) aluminium voice coil
- Titanium diaphragm
- 500 - 20000 Hz response
- 108 dB sensitivity
- Neodymium magnet assembly with shorting copper cap

The DE1095TN is one of the latest versions of our premium 100mm (4.0 in) voice coil, neodymium high frequency driver. The diaphragm in this model has been completely redesigned to incorporate a bent edge voice coil former as well as new dome and surround geometry. These modifications combine to better control diaphragm displacement and deformations, resulting in lower distortion and a smoother higher frequency response above 10kHz.

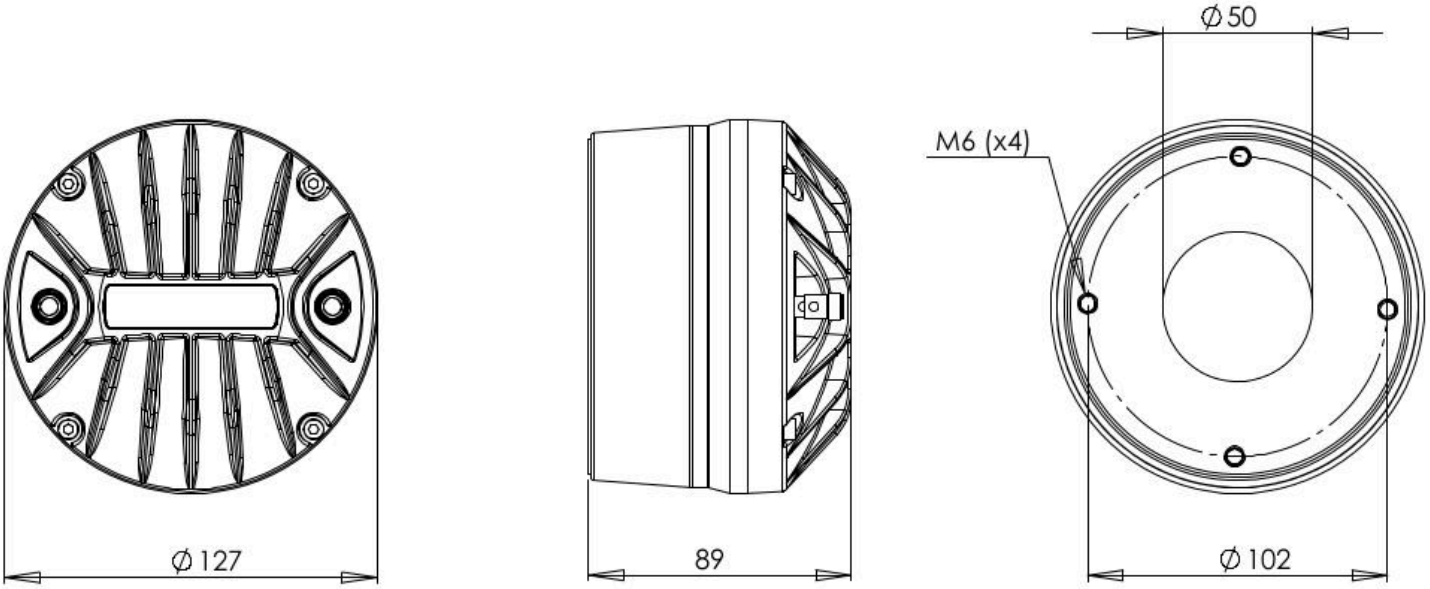
B&C Speakers S.p.A. Via Poggiomoro, 1 - Loc. Vallina, 50012 Bagno a Ripoli (FI) | ITALY
Tel. +39 055 65721 | Fax +39 055 6572312 | mail@bcspeakers.com

DE1095TN 8 Ω


+120
+115
+110
+105
+100
+95
+90
+85
+80
+75
+70
dB SPL
20
50
100
200
500
1k
2k
5k
10k
20k
Hz


200
100
50
20
10
5
2
OHM
20
50
100
200
500
1k
2k
5k
10k
20k
Hz

DE1095TN 8 Ω



B&C Speakers S.p.A. Via Poggiomoro, 1 - Loc. Vallina, 50012 Bagno a Ripoli (FI) | ITALY
Tel. +39 055 65721 | Fax +39 055 6572312 | mail@bcspeakers.com