DE254TN 8 Ω

SPECIFICATIONS

Driver mounted on B&C ME 90 horn.

Throat Diameter	**36 mm (1.4 in)**
Nominal Impedance	**8 Ω**
Minimum Impedance	**7.8 Ω**
Nominal Power Handling 2 hour test made with continuous pink noise signal within the range from the recommended crossover frequency to 20 kHz. Power calculated on rated minimum impedance.	**60 W**
Continuous Power Handling Power on Continuous Program is defined as 3 dB greater than the Nominal rating.	**120 W**
Sensitivity Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.	**106.5 dB**
Frequency Range	**1 kHz - 19 kHz**
Recommended Crossover 12 dB/oct. or higher slope high-pass filter.	**1.5 kHz**
Voice Coil Diameter	**44 mm (1.7 in)**
Winding Material	**Aluminium**
Inductance	**0.11 mH**
Flux Density	**1.85 T**
Diaphragm Material	**Titanium**

MOUNTING AND SHIPPING INFO

Four M6 holes 90° on 102 mm (4 in) diameter

Overall Diameter	**120 mm (4.7 in)**
Depth	**85 mm (3.3 in)**
Net Weight	**2.4 kg (5.3 lb)**
Shipping Units	**1 pcs**
Shipping Weight	**2.44 kg (5.39 lb)**
Shipping Box	**135x135x93 mm (5.31x5.31x3.66 in)**

SERVICE KITS


HF replacement-diaphragm	**MMD5028M**




- 120 W continuous program power capacity
- 1.4" horn throat diameter
- 44 mm (1.7 in) aluminium voice coil
- Titanium diaphragm
- 1000 - 19000 Hz response
- 106.5 dB sensitivity

B&C Speakers S.p.A. Via Poggiomoro, 1 - Loc. Vallina, 50012 Bagno a Ripoli (FI) | ITALY
Tel. +39 055 65721 | Fax +39 055 6572312 | mail@bcspeakers.com

DE254TN 8 Ω

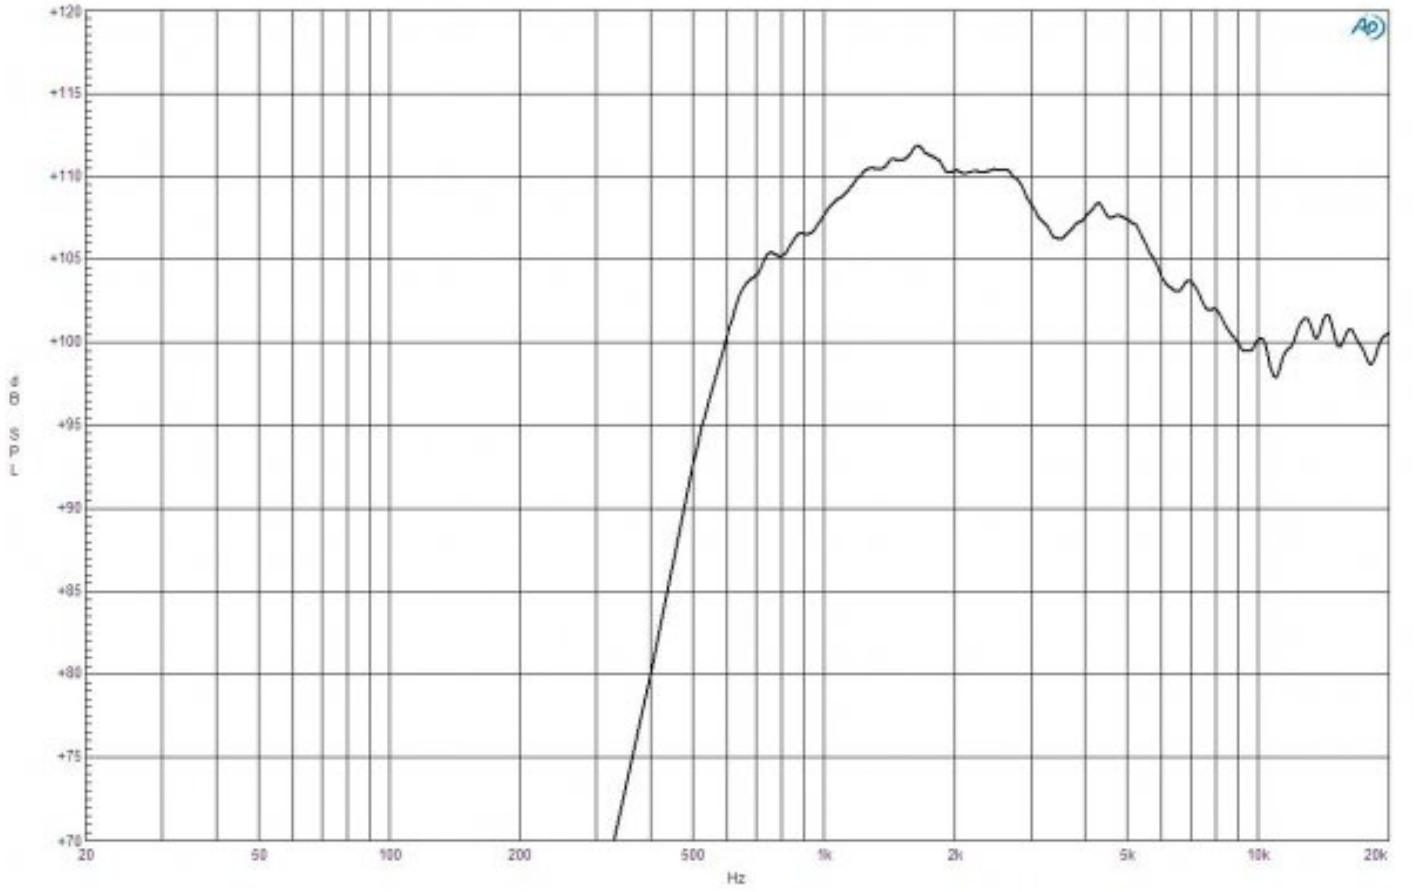

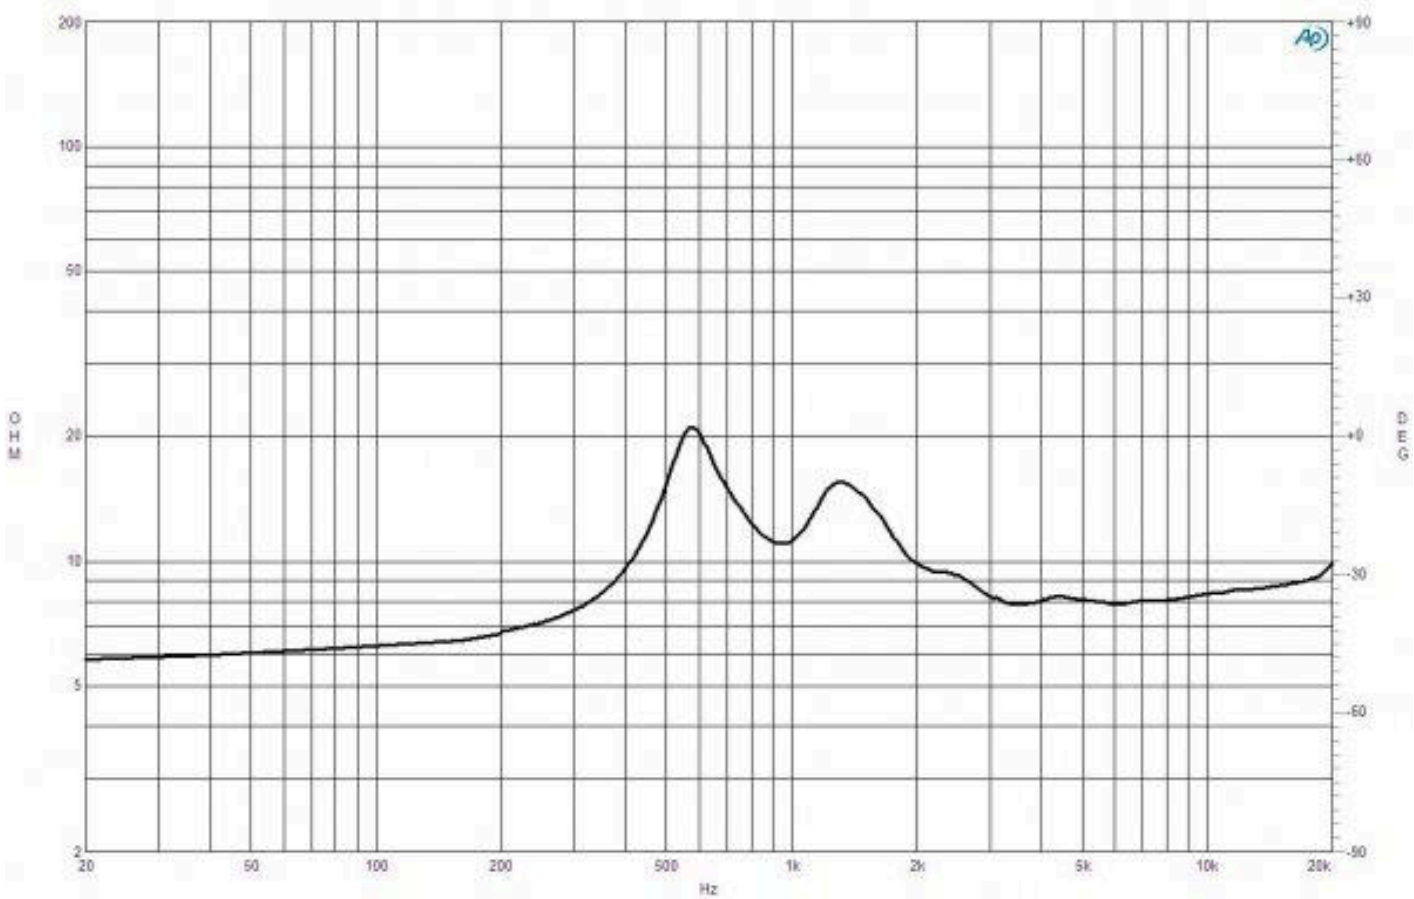

B&C Speakers S.p.A. Via Poggiomoro, 1 - Loc. Vallina, 50012 Bagno a Ripoli (FI) | ITALY
Tel. +39 055 65721 | Fax +39 055 6572312 | mail@bcspeakers.com

DE254TN 8 Ω

