DE35 8 Ω

SPECIFICATIONS

Nominal Impedance	**8 Ω**
Minimum Impedance	**7 Ω**
Nominal Power Handling 2 hour test made with continuous pink noise signal within the range from the recommended crossover frequency to 20 kHz. Power calculated on rated minimum impedance.	**25 W**
Continuous Power Handling Power on Continuous Program is defined as 3 dB greater than the Nominal rating.	**50 W**
Sensitivity Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.	**108 dB**
Frequency Range	**3.5 kHz - 18 kHz**
Recommended Crossover 12 dB/oct. or higher slope high-pass filter.	**5 kHz**
Voice Coil Diameter	**32 mm (1.25 in)**
Winding Material	**Aluminium**
Inductance	**0.1 mH**
Flux Density	**1.3 T**
Diaphragm Material	**Polyester**

MOUNTING AND SHIPPING INFO

Overall Diameter	**100 mm (4 in)**
Depth	**46 mm (1.8 in)**
Net Weight	**0.55 kg (1.21 lb)**
Shipping Units	**1 pcs**
Shipping Weight	**0.58 kg (1.28 lb)**
Shipping Box	**105x105x65 mm (4.13x4.13x2.56 in)**

SERVICE KITS


HF replacement-diaphragm	**MMD0358**


- 50 W continuous program power capacity
- 3500 - 18000 Hz response
- 108 dB sensitivity
- Neodymium magnet assembly




B&C Speakers S.p.A. Via Poggiomoro, 1 - Loc. Vallina, 50012 Bagno a Ripoli (FI) | ITALY
Tel. +39 055 65721 | Fax +39 055 6572312 | mail@bcspeakers.com

DE35 8 Ω

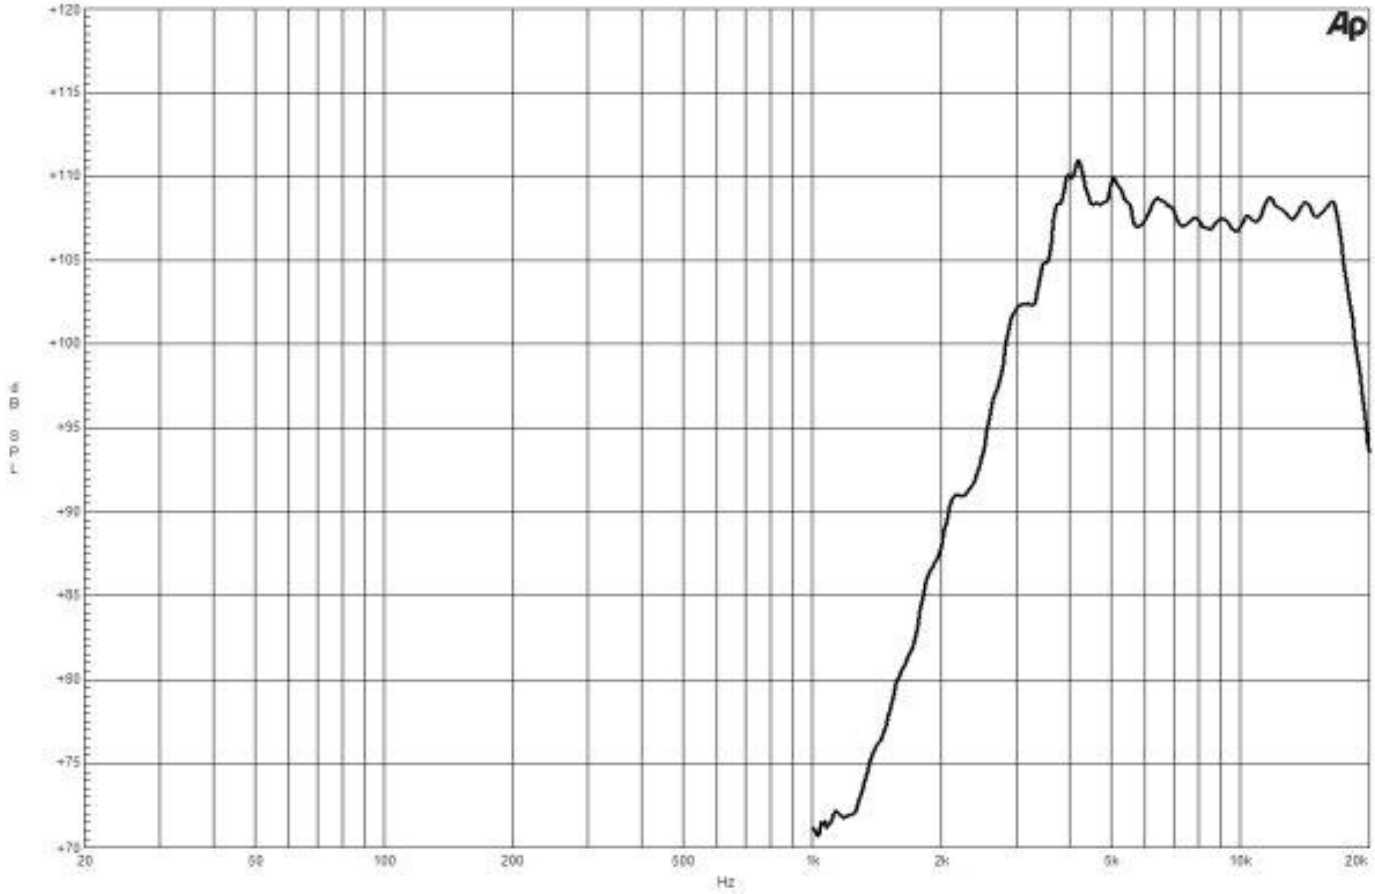
dB SPL
Hz
20
50
100
200
500
1k
2k
5k
10k
20k

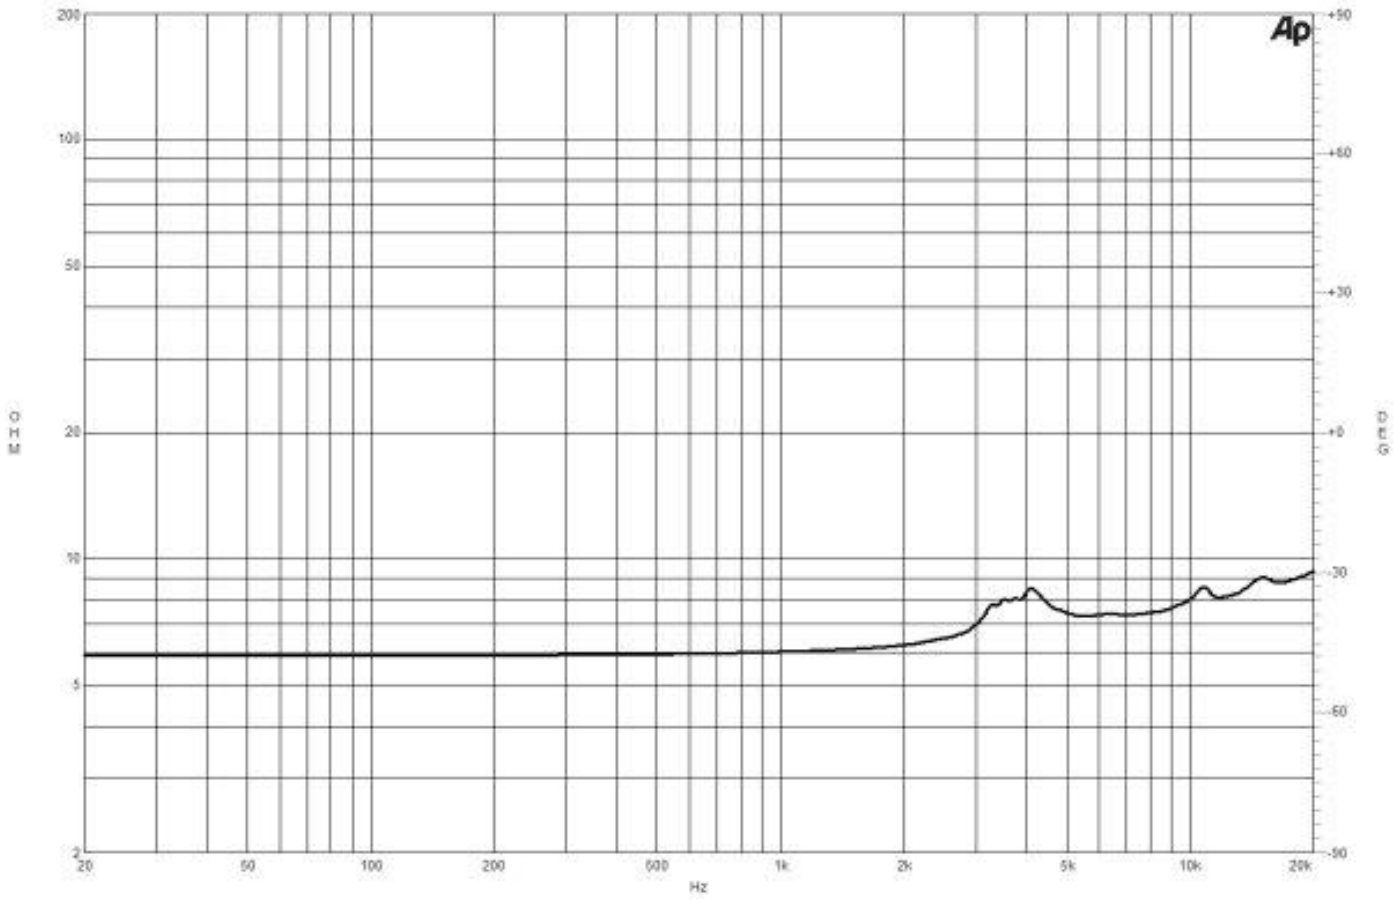

OHM
DEG
Hz
20
50
100
200
500
1k
2k
5k
10k
20k


DE35 8 Ω

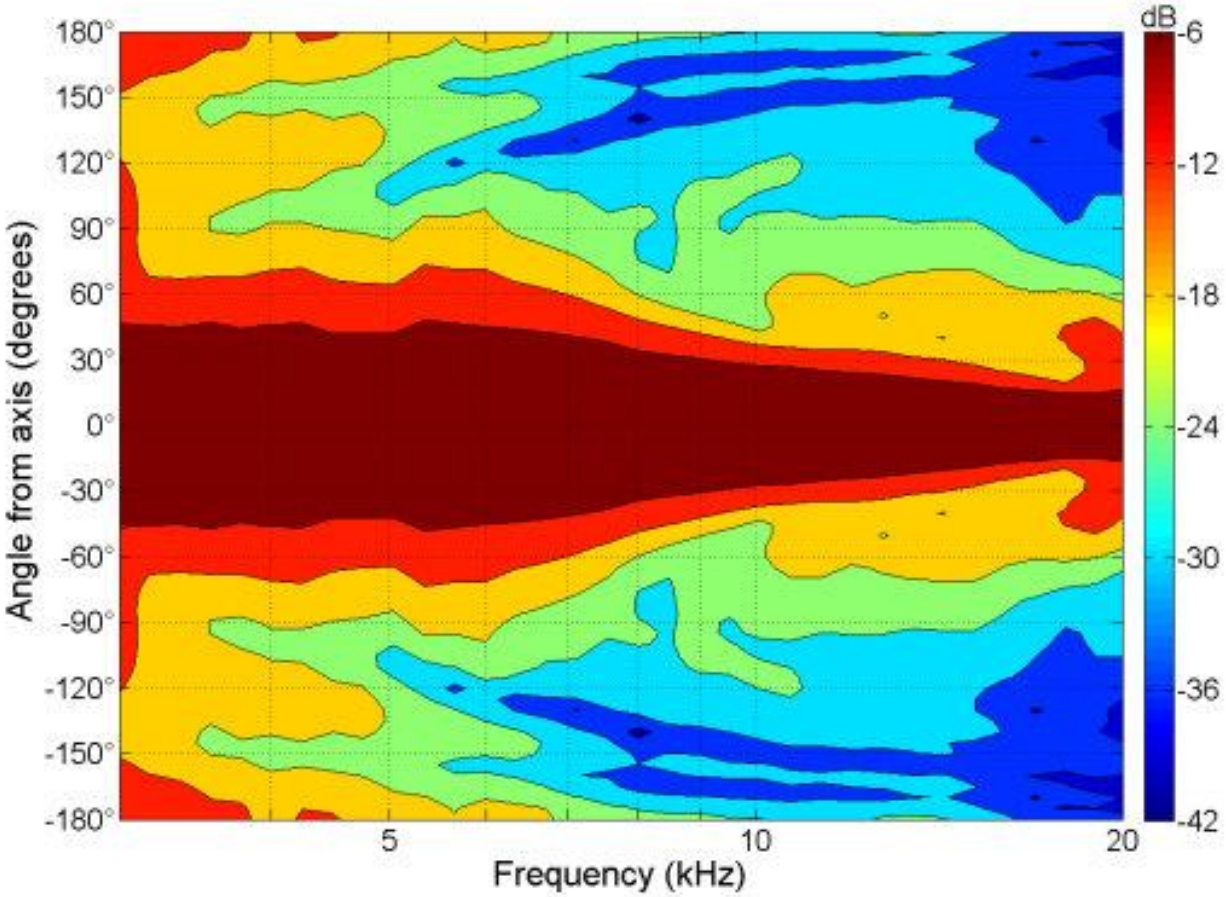

B&C Speakers S.p.A. Via Poggiomoro, 1 - Loc. Vallina, 50012 Bagno a Ripoli (FI) | ITALY
Tel. +39 055 65721 | Fax +39 055 6572312 | mail@bcspeakers.com

DE35 8 Ω

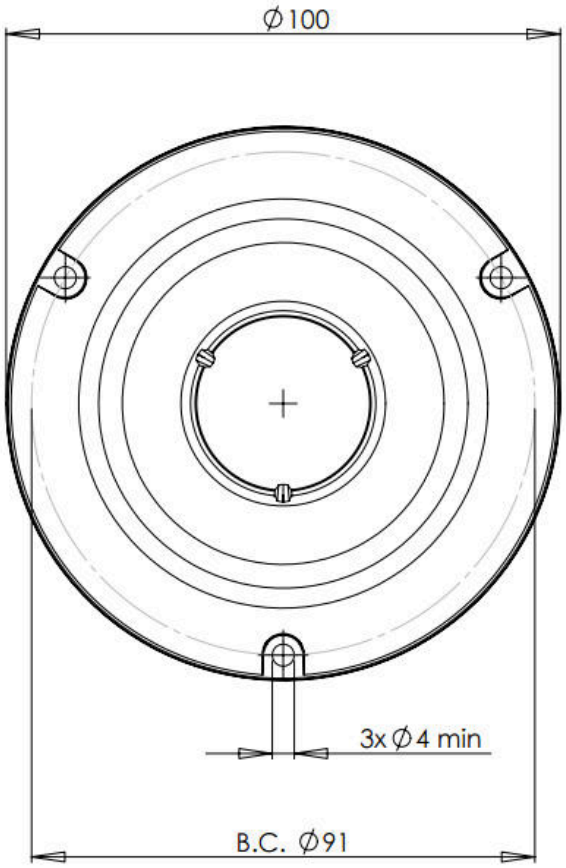

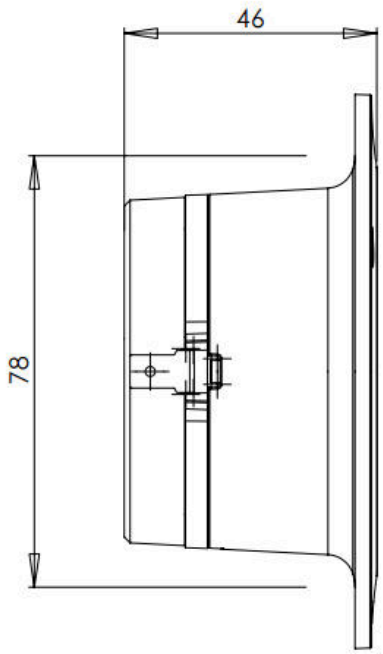

B&C Speakers S.p.A. Via Poggiomoro, 1 - Loc. Vallina, 50012 Bagno a Ripoli (FI) | ITALY
Tel. +39 055 65721 | Fax +39 055 6572312 | mail@bcspeakers.com