FB354V2 16 Ω

SPECIFICATIONS

Frequency response and Impedance graphs measured on ME464 horn


Crossover Frequency	**5.6 kHz**
Filter Type	**Two Way**
Slope	**18 - 12 dB/oct**
Overall Dimensions	**105x137 mm (4.13x5.39 in)**

MOUNTING AND SHIPPING INFO

Net Weight	**0.53 kg (1.17 lb)**
Shipping Units	**1 pcs**
Shipping Weight	**0.57 kg (1.26 lb)**
Shipping Box	**147x117x58 mm (5.79x4.61x2.28 in)**

POTENTIAL APP. COAXIALS HF


DCX354	**16Ω**

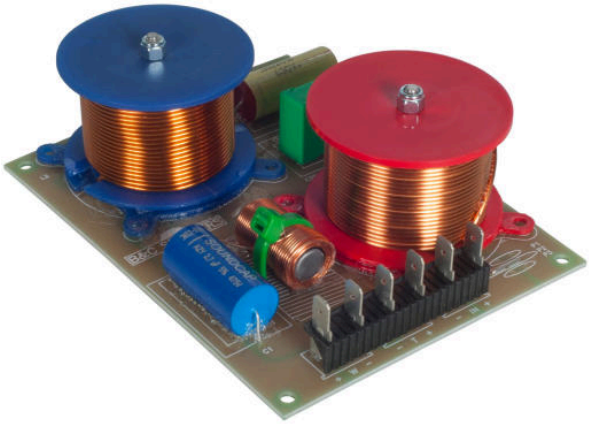


Reinforced PRO version of the popular FB354 crossover, for more challenging applications. The FB354v2 shares the same circuit diagram of the FB354, substituting inductors with higher power ratings and eliminating the built-in light bulb protection network. The FB354v2 allows the user more control to optimize DSP limiter settings for higher maximum SPL while maintaining a safe work margin for the DCX354.


B&C Speakers S.p.A. Via Poggiomoro, 1 - Loc. Vallina, 50012 Bagno a Ripoli (FI) | ITALY
Tel. +39 055 65721 | Fax +39 055 6572312 | mail@bcspeakers.com

FB354V2 16 Ω

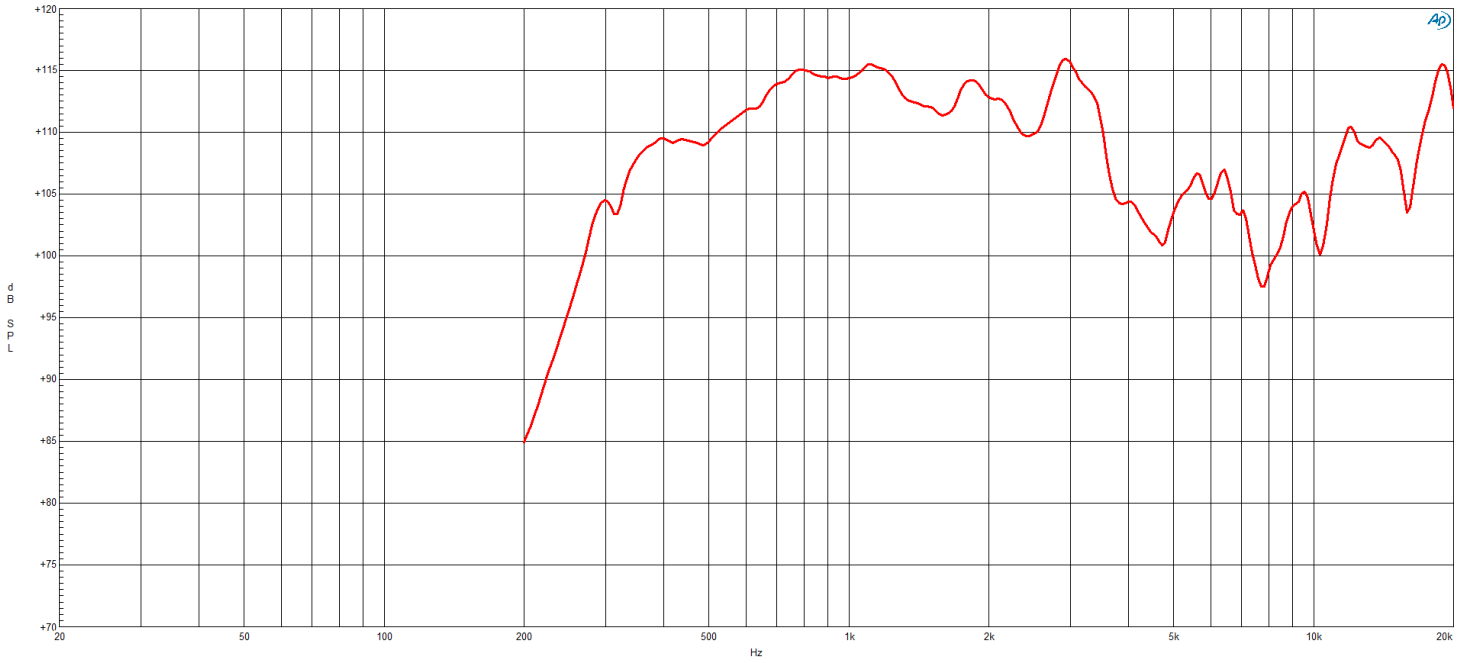
+120
+115
+110
+105
+100
+95
+90
+85
+80
+75
+70
dB SPL
20
50
100
200
500
1k
2k
5k
10k
20k
Hz

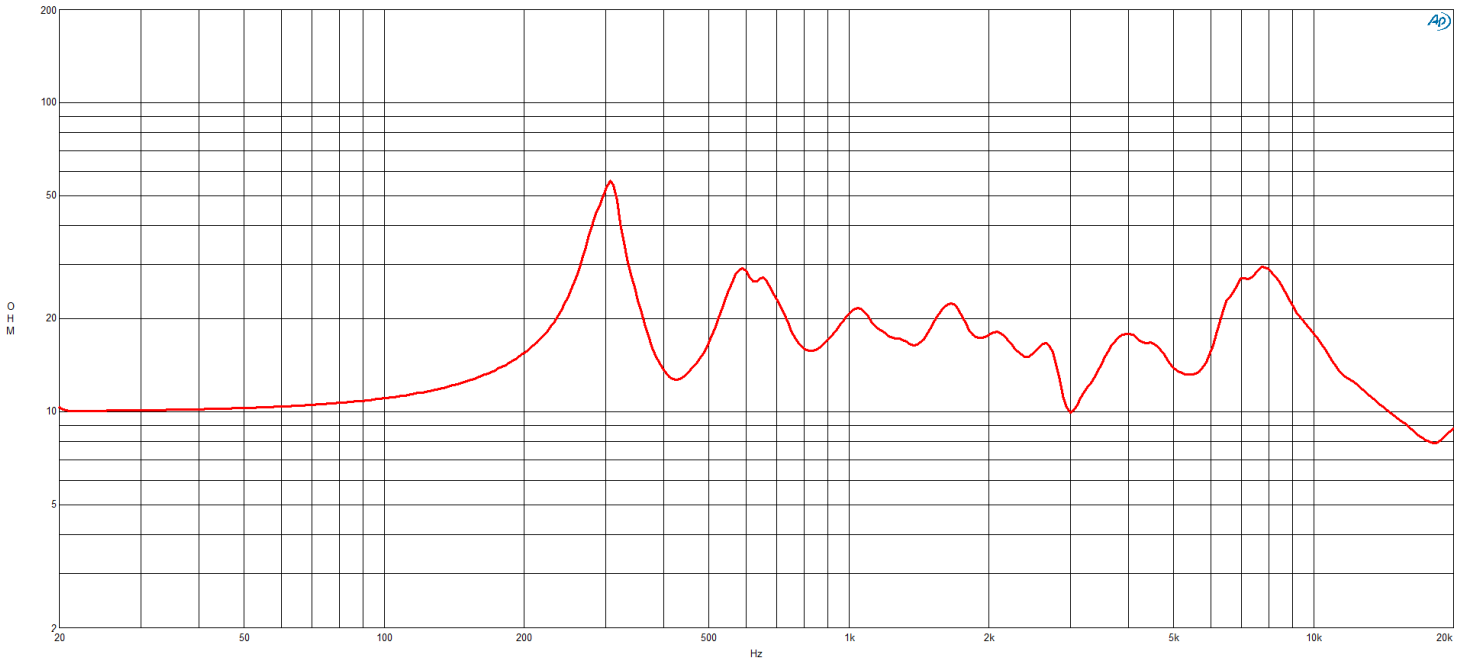
200
100
50
20
10
5
2
OHM
20
50
100
200
500
1k
2k
5k
10k
20k
Hz

FB354V2 16 Ω

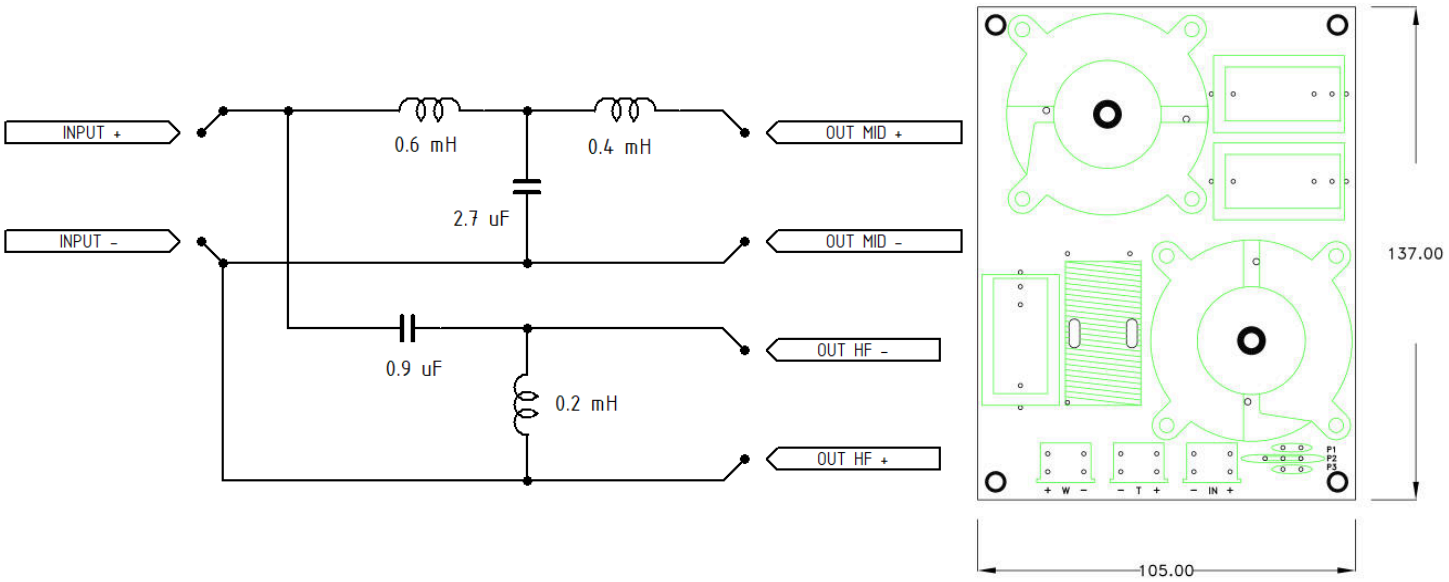

B&C Speakers S.p.A. Via Poggiomoro, 1 - Loc. Vallina, 50012 Bagno a Ripoli (FI) | ITALY
Tel. +39 055 65721 | Fax +39 055 6572312 | mail@bcspeakers.com