ME60

SPECIFICATIONS

Horn mounted on B&C DE 750 compression driver.

Throat Diameter	**50 mm (2 in)**
Nominal Coverage Horizontal	**60 °**
Nominal Coverage Vertical	**40 °**
Cutoff Frequency	**0.8 kHz**
Material	**Cast Aluminium**
Dimensions	**270x237x202 mm (10.6x9.3x7.9 in)**

MOUNTING AND SHIPPING INFO


Baffle Cutout Dimension	**232 mm (9.1 in)**
Air Volume Occupied by Driver	**0.45 dm^3 (0.02 ft^3)**
Net Weight	**1.69 kg (3.73 lb)**
Shipping Units	**1 pcs**
Shipping Weight	**2.29 kg (5.06 lb)**
Shipping Box	**290x260x260 mm (11.42x10.24x10.24 in)**


- 2" throat entry
- 60° x 40° nominal coverage
- Constant Directivity
- Excellent loading down to 800 Hz



B&C Speakers S.p.A. Via Poggiomoro, 1 - Loc. Vallina, 50012 Bagno a Ripoli (FI) | ITALY
Tel. +39 055 65721 | Fax +39 055 6572312 | mail@bcspeakers.com


ME60

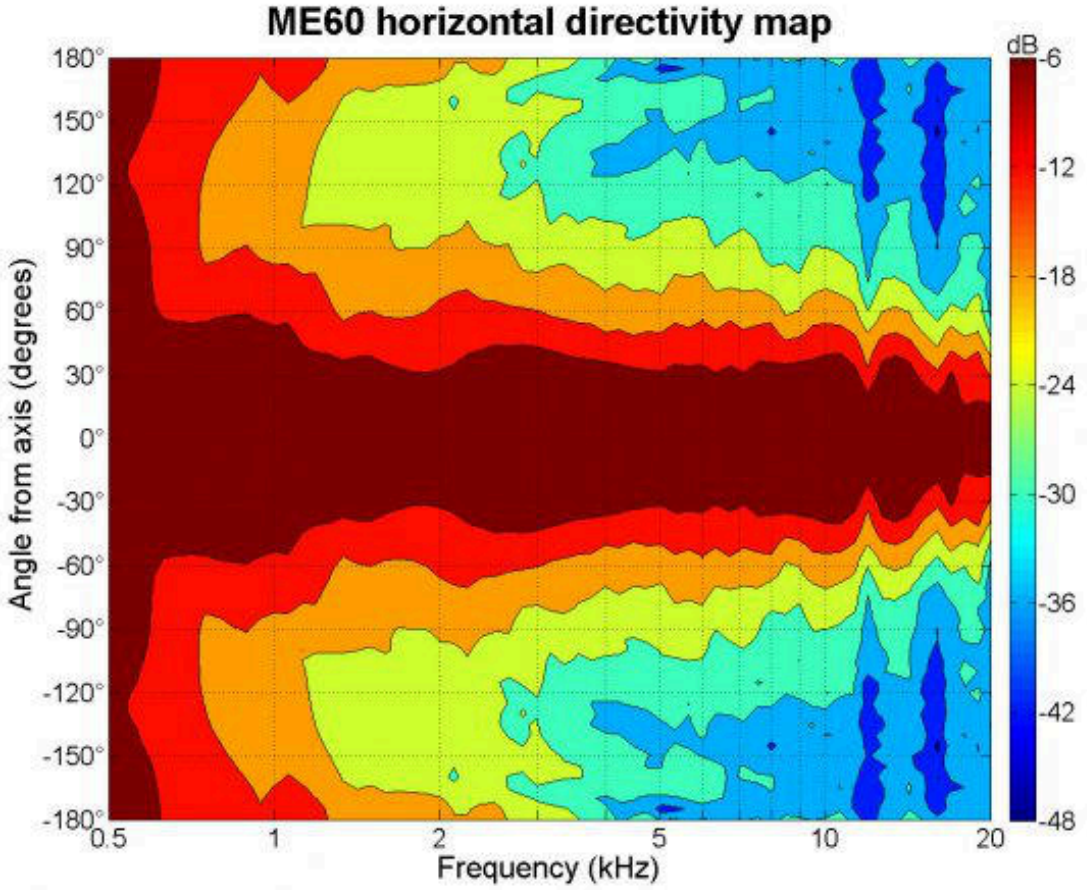


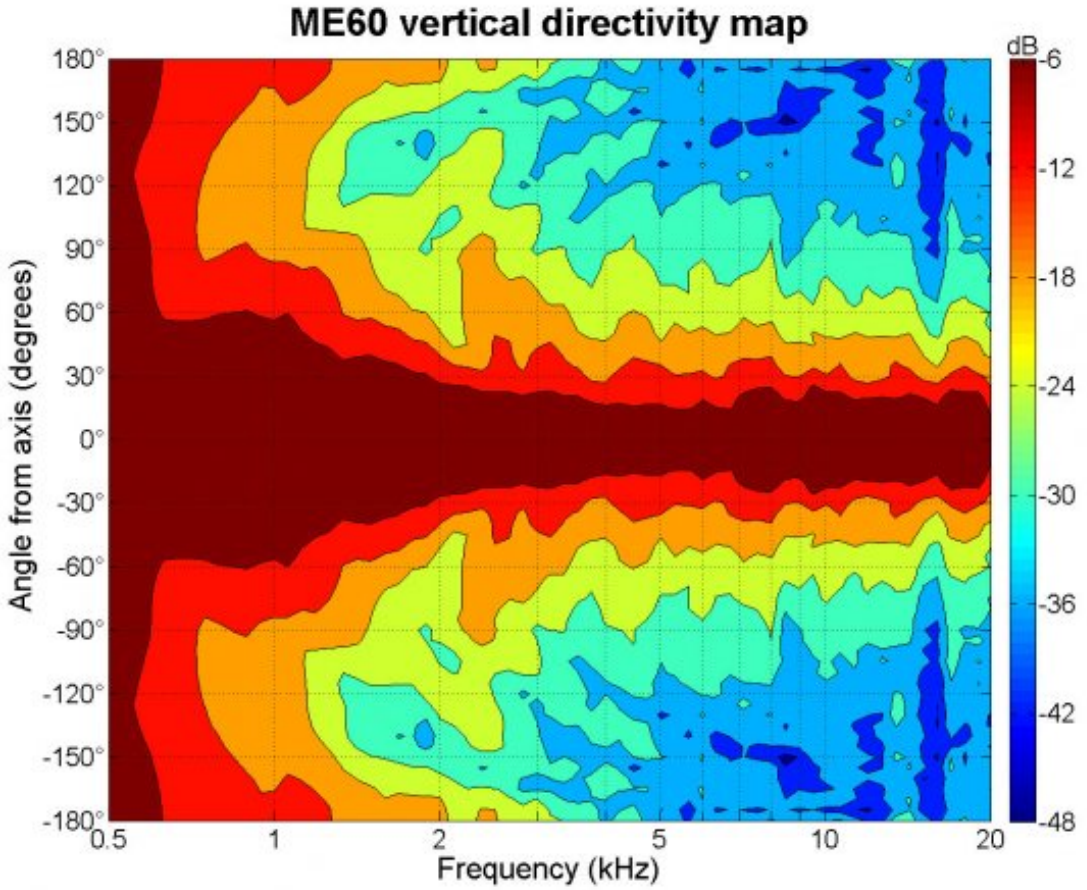

B&C Speakers S.p.A. Via Poggiomoro, 1 - Loc. Vallina, 50012 Bagno a Ripoli (FI) | ITALY
Tel. +39 055 65721 | Fax +39 055 6572312 | mail@bcspeakers.com

ME60

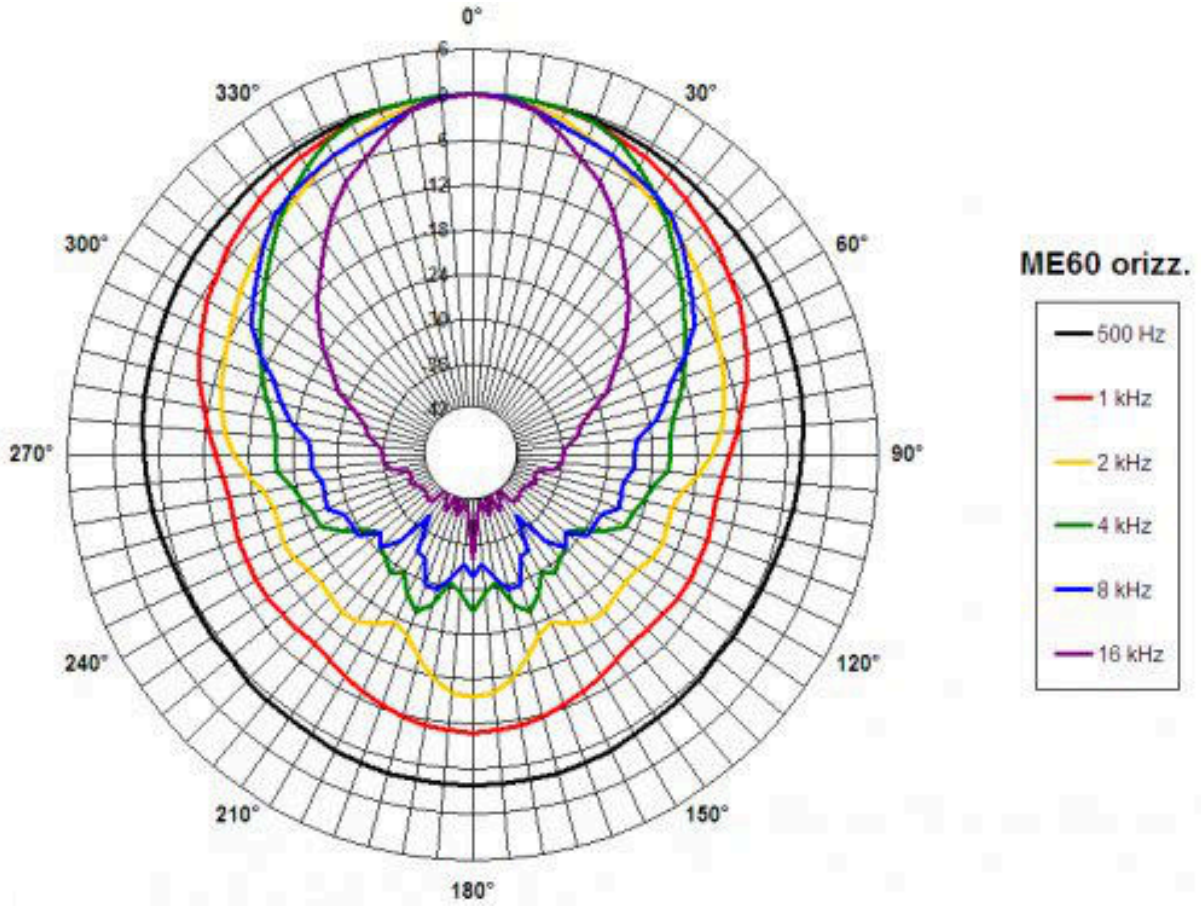

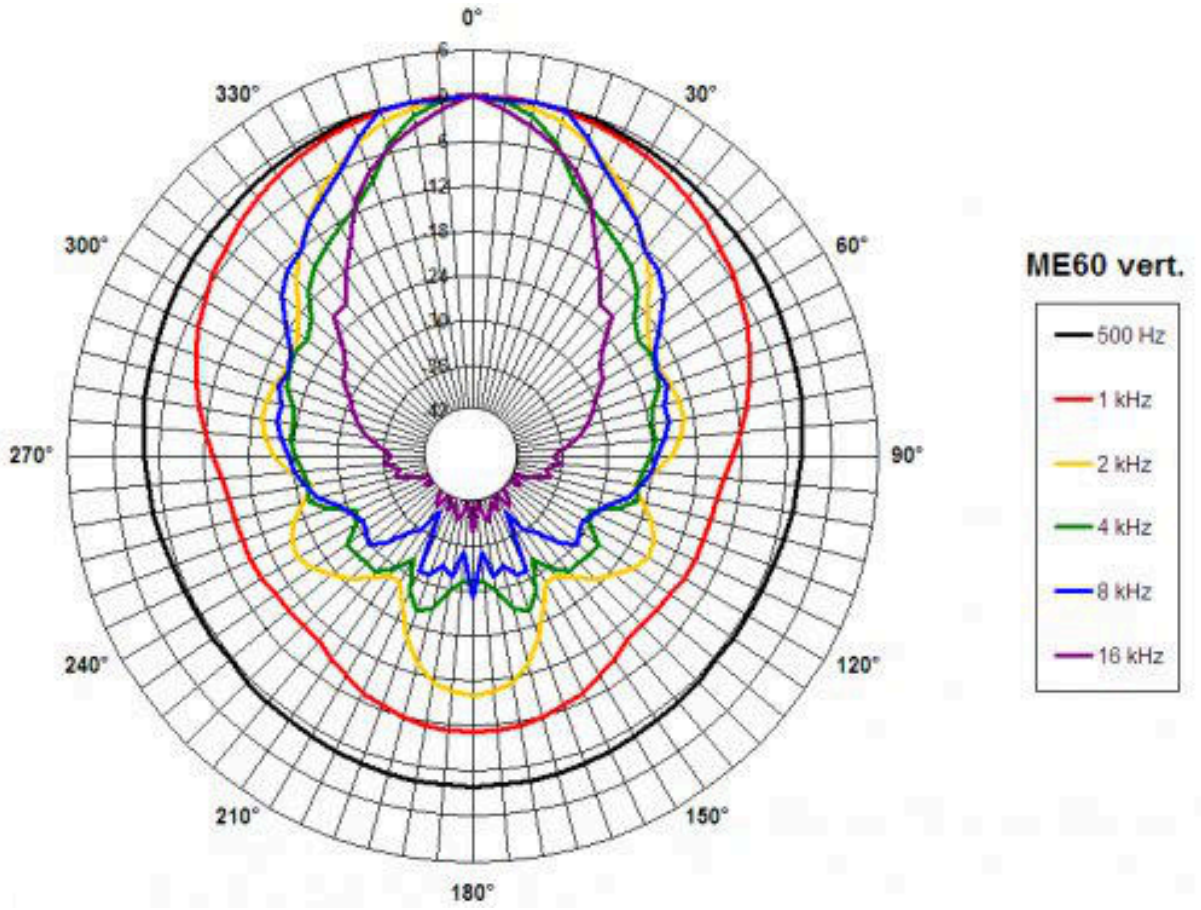

B&C Speakers S.p.A. Via Poggiomoro, 1 - Loc. Vallina, 50012 Bagno a Ripoli (FI) | ITALY
Tel. +39 055 65721 | Fax +39 055 6572312 | mail@bcspeakers.com

ME60

