beyma

PROFESSIONAL LOUDSPEAKERS

www.beyma.com

12G40

LOW FREQUENCY TRANSDUCER

G40 Series

KEY FEATURES

- High power handling 500 W_{AES}
- High sensitivity: 97 dB (1W / 1m)
- 3” copper voice coil with polymide fiber glass former
- Extended controlled displacement: X_{max} ± 7 mm
- 28 mm peak-to-peak excursion before damage
- Designed for woofer applications





TECHNICAL SPECIFICATIONS

Nominal diameter	300 mm	12 in
Rated impedance		8 Ω
Minimum impedance		6,7 Ω
Power capacity [1]		500 W_{AES}
Program power [2]		1.000 W
Sensitivity	97 dB	1W / 1m @ Z_N
Frequency range		45 - 4.000 Hz
Recom. enclosure vol.	20 / 70 l	0,7 / 2,6 ft^3
Voice coil diameter	76,2 mm	3 in
Bl factor		18,4 N/A
Moving mass		0,062 kg
Voice coil length		17,5 mm
Air gap height		8 mm
X_{damage} (peak to peak)		28 mm

THIELE-SMALL PARAMETERS [3]

Resonant frequency, f_s	44 Hz
D.C. Voice coil resistance, R_e	6 Ω
Mechanical Quality Factor, Q_{ms}	11,6
Electrical Quality Factor, Q_{es}	0,30
Total Quality Factor, Q_{ts}	0,30
Equivalent Air Volume to C_{ms}, V_{as}	81 l
Mechanical Compliance, C_{ms}	206 µm / N
Mechanical Resistance, R_{ms}	1,5 kg / s
Efficiency, η_0	2,3 %
Effective Surface Area, S_d	0,053 m^2
Maximum Displacement, X_{max} [4]	7 mm
Displacement Volume, V_d	371 cm^3
Voice Coil Inductance, L_e	2,1 mH

Notes:

[1] The power capaticty is determined according to AES2-1984 (r2003) standard.

[2] Program power is defined as power capacity + 3 dB.

[3] T-S parameters are measured after an exercise period using a preconditioning power test. The measurements are carried out with a velocity-current laser transducer and will reflect the long term parameters (once the loudspeaker has been working for a short period of time).

[4] The X_{max} is calculated as $(L_{vc} - H_{ag})/2 + (H_{ag}/3,5)$, where L_{vc} is the voice coil length and H_{ag} is the air gap height.

Acústica Beyma SL - P.I. Moncada II, C/ Pont Sec, 1C - 46113 Moncada, Valencia (Spain) - Tel. +34 96 130 13 75 - beyma@beyma.com

beyma


PROFESSIONAL LOUDSPEAKERS

www.beyma.com

12G40

LOW FREQUENCY TRANSDUCER

G40 Series

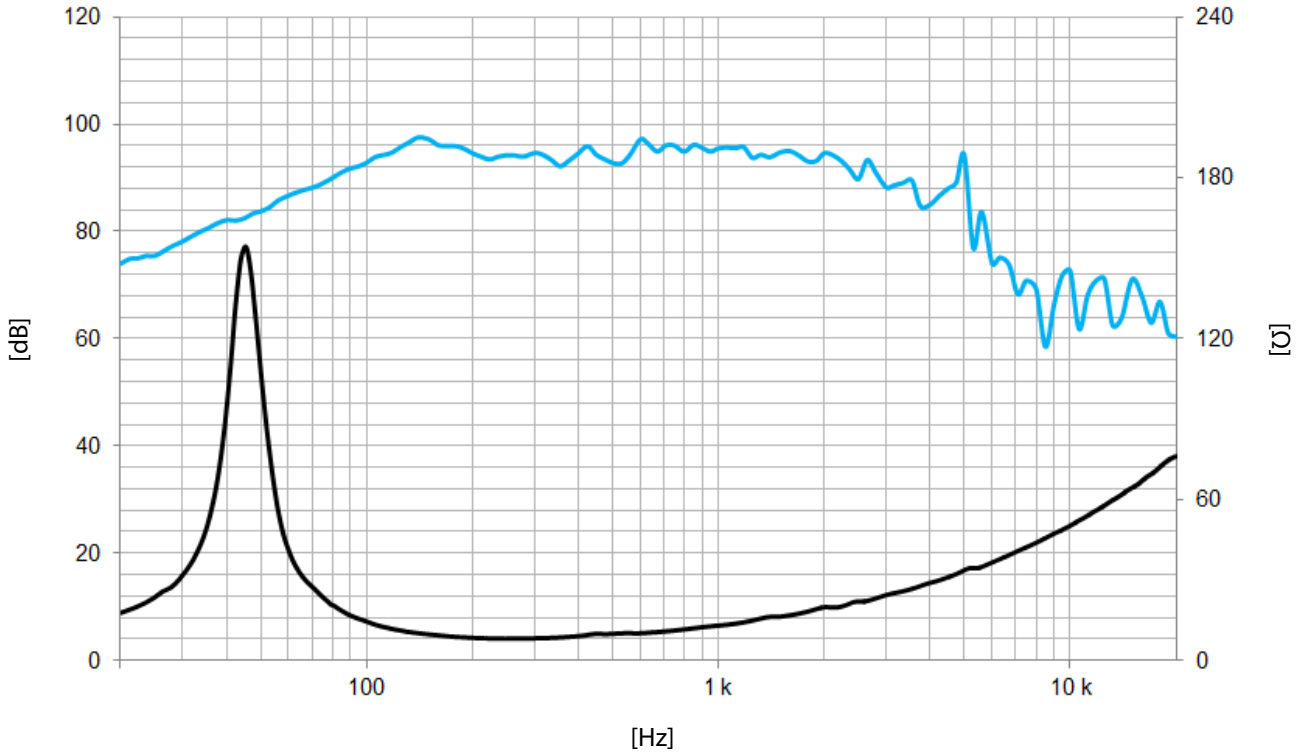



Note: Frequency response measured with loudspeaker standing on infinite baffle in anechoic chamber, 1W @ 1m

MOUNTING INFORMATION

Overall diameter	312 mm	12,3 in
Bolt circle diameter	294,5 mm	11,6 in
Baffle cutout diameter:		
- Front mount	278 mm	10,9 in
Depth	133 mm	5,2 in
Net weight	7,1 kg	15,6 lb
Shipping weight	7,8 kg	17,2 lb

DIMENSION DRAWING

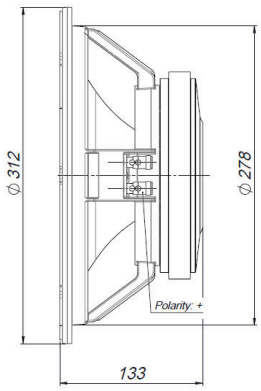

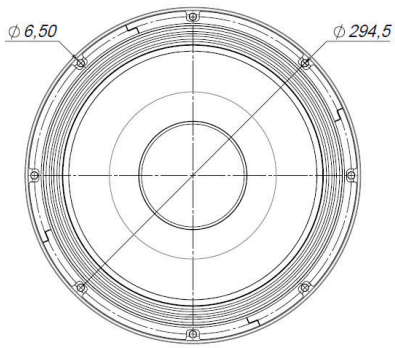

Acústica Beyma SL - P.I. Moncada II, C/ Pont Sec, 1C - 46113 Moncada, Valencia (Spain) - Tel. +34 96 130 13 75 - beyma@beyma.com

11/06