beyma

PROFESSIONAL LOUDSPEAKERS
www.beyma.com

6P200Fe 16Ω

LOW FREQUENCY TRANSDUCER

P200 Series

KEY FEATURES

- 400 W program power
- Sensitivity: 93 dB (1W / 1m)
- Extended controlled displacement: X_{max} ± 4 mm
- 20 mm peak-to-peak excursion before damage
- Copper shorting cap for low harmonic distortion
- CONEX spider
- Waterproof paper cone with rubber surround
- Designed for for small / compact designs





TECHNICAL SPECIFICATIONS

Nominal diameter	165 mm	6,5 in
Rated impedance		16 Ω
Minimum impedance		11,8 Ω
Power capacity [1]		200 W_{AES}
Program power [2]		400 W
Sensitivity	93 dB	1W / 1m @ Z_N
Frequency range		70 - 9.000 Hz
Voice coil diameter	50,8 mm	2 in
Bl factor		13,6 N/A
Moving mass		0,016 kg
Voice coil length		12 mm
Air gap height		9 mm
X_{damage} (peak to peak)		20 mm

THIELE-SMALL PARAMETERS [3]

Resonant frequency, f_s	66 Hz
D.C. Voice coil resistance, R_e	9,9 Ω
Mechanical Quality Factor, Q_{ms}	4,3
Electrical Quality Factor, Q_{es}	0,38
Total Quality Factor, Q_{ts}	0,35
Equivalent Air Volume to C_{ms}, V_{as}	8,8 l
Mechanical Compliance, C_{ms}	343 µm / N
Mechanical Resistance, R_{ms}	1,6 kg / s
Efficiency, η_0	0,7 %
Effective Surface Area, S_d	0,0135 m^2
Maximum Displacement, X_{max} [4]	4 mm
Displacement Volume, V_d	54 cm^3
Voice Coil Inductance, L_e	0,3 mH

Notes:

[1] The power capaticty is determined according to AES2-1984 (r2003) standard.

[2] Program power is defined as power capacity + 3 dB.

[3] T-S parameters are measured after an exercise period using a preconditioning power test. The measurements are carried out with a velocity-current laser transducer and will reflect the long term parameters (once the loudspeaker has been working for a short period of time).

[4] The X_{max} is calculated as $(L_{vc} - H_{ag})/2 + (H_{ag}/3,5)$, where L_{vc} is the voice coil length and H_{ag} is the air gap height.

Acústica Beyma SL - P.I. Moncada II, C/ Pont Sec, 1C - 46113 Moncada, Valencia (Spain) - Tel. +34 96 130 13 75 - beyma@beyma.com

beyma


PROFESSIONAL LOUDSPEAKERS

www.beyma.com

6P200Fe 16Ω

LOW FREQUENCY TRANSDUCER

P200 Series

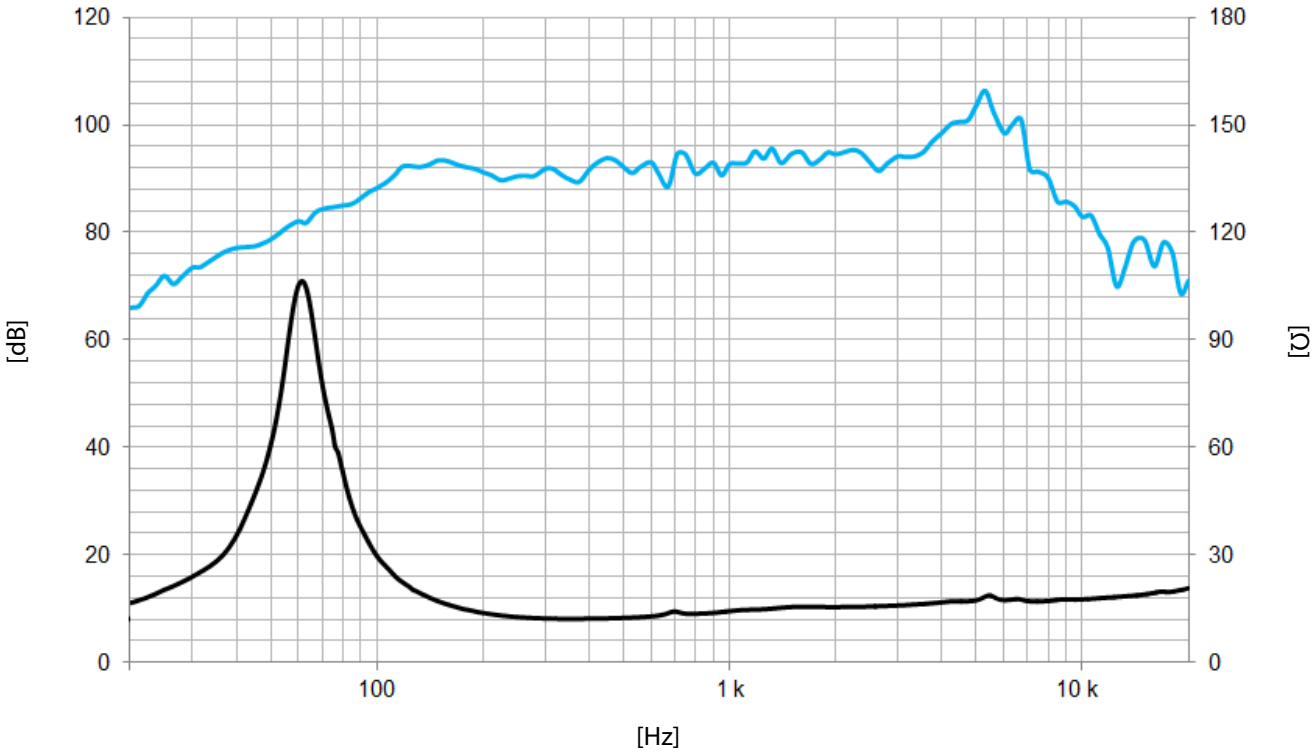

Note: Frequency response measured with loudspeaker standing on infinite baffle in anechoic chamber, 1W @ 1m

MOUNTING INFORMATION

Overall diameter	187,5 mm	7,4 in
Bolt circle diameter	172 mm	6,8 in
Baffle cutout diameter:		
- Front mount	146 mm	5,7 in
Depth	87 mm	3,4 in
Net weight	3,1 kg	6,8 lb
Shipping weight	3,5 kg	7,8 lb

DIMENSION DRAWING

