LF Loudspeakers

CF1230BMB


12-inch cast aluminium chassis, ferrite magnet bass/mid-bass driver

- Optimised for bass and mid/bass applications
- Half-roll Elastomer surround enables greater Xmax/Xmech
- Modified T-pole enhances performance through improved Bl symmetry
- Airflow vented magnet assembly for dynamic heat dispersion
- Demodulation ring for reduced harmonic and intermodulation distortion

700W
Continuous power rating

96dB
Sensitivity

3in
Copper clad aluminium voice coil

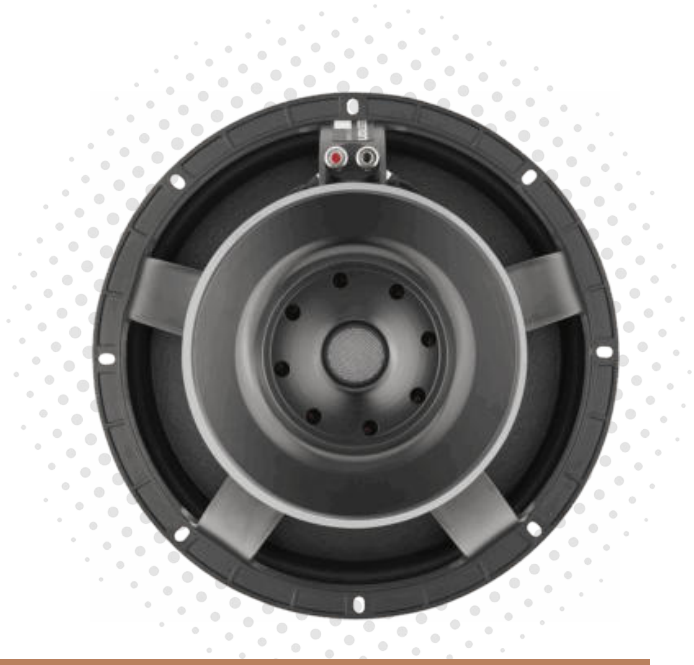

General Specifications

Nominal Diameter	305mm / 12in
Power Rating	350W
Continuous power rating	700W
Rated impedance	8 ohm
Sensitivity	96dB
Frequency range	50-3,000Hz
Chassis type	Cast aluminium
Magnet type	Ferrite
Magnet weight	2.2kg / 75oz
Voice coil diameter	75mm / 3in
Voice coil material	Copper clad aluminium
Former material	Glass Fibre
Cone material	Glass loaded paper (weather-resistant)
Surround material	Elastomer
Suspension	Single
Gap height (Hg)	8mm / 0.31in
VC winding height (Hvc)	18mm / 0.7in
Additional impedances	16 ohm


Mounting Information

Overall diameter	315mm / 12.4in
Overall depth	155.5mm / 6.1
Cut-out diameter	285.6mm / 11.24in
Mounting hole dimensions	10mmx6.5mm / 0.39inx0.26in
Number of mounting holes	8
Mounting hole PCD	294-300mm / 11.6-11.8in
Unit weight	6.75kg / 14.9lb

Parameters

Sd	530.93cm^2 / 82.3in^2
Fs	43.4Hz
Mms	88.41g / 3.12oz
Qms	4.451
Qes	0.417
Qts	0.381
Re	5.84 ohm
Vas	60.68l / 2.14ft^3
Bl	18.38Tm
Cms	0.152mm/N
Rms	5.416kg/s
Le (at 1kHz)	0.713mH
Xmax	7mm / 0.28in

Frequency Response and Impedance Curves

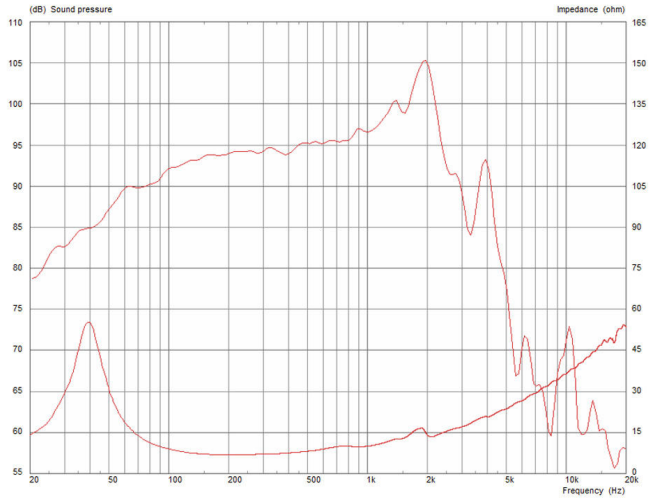

Packed Dimensions & Weight

Single pack size W x D x H	360mm x 360mm x 200mm / 14.2in x 14.2in x 7.9in
Single pack weight	7.9kg / 17.4lb

Power rating: Tested for two hours using a continuous, band-limited pink noise signal as per AES standard. Power calculated on minimum impedance. Loudspeaker tested in free air.
Continuous power rating: Defined as 3dB greater than the AES rating.
Sensitivity: Measured on axis at 1W, 1m in 2? anechoic environment.
Parameters: Measured after unit subjected to pre-conditioning signal.
Xmax: 0.5*(Hvc-Hg) + 0.25*Hg

Celestion, Claydon Business Park, Great Blakenham, Ipswich, IP6 0NL United Kingdom