
CT268ND




1" 4 Ohm NEO Tweeter

Diaphragm Material	Aluminum
Voice Coil Diameter	26 mm 1 in
Continuous Power Handling	250 W

DATASHEET DRAWINGS

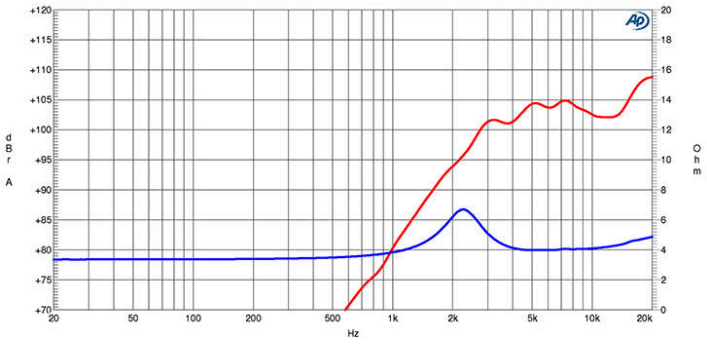

DRAWINGS

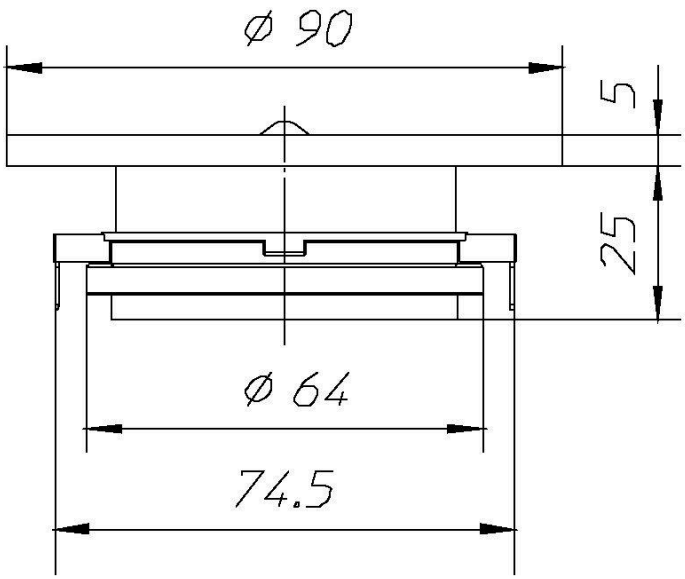

CT268ND

SPECIFICATIONS

Nominal Diameter	26 mm (1 in)
Nominal Impedance	4 ©
Nominal Power Handling	150 W Nominal power is determined according to AES2-1984 (r2003) standard.
Continuous Power Handling	250 W Program Power is defined as 3 dB greater than the Nominal rating.
Sensitivity	105 dB W/1m Sensitivity represents the averaged value of acoustic output as measured on the forward central axis of cone, at distance 1m, when connected to 2,83V sine wave test signal.
Frequency Range	4000 kHz - 20000 kHz Frequency range is given as the band of frequencies delineated by the lower and upper limits where the output level drops by 10 dB below the rated sensitivity in half space environment.
Voice Coil Diameter	26 mm (1 in)
Winding Depth	3 mm (0.12 in)
Diaphragm Material	Aluminum

PARAMETERS

Fs	2300 Hz
Re	3.25 ©

DESIGN

Surround Shape	Nomex Fabric
Cone Shape	Planar
Connection Type	Faston
Cone Material	Aluminum

MOUNTING AND SHIPPING INFO

Overall Diameter	90 mm (3.54 in)
Bolt Circle Diameter	116 mm (4.57 in)
Baffle Cutout Diameter	64 mm (2.52 in)
Depth	30 mm (1.18 in)
Flange and Gasket Thickness	5 mm (0.2 in)
Net Weight	0.45 kg (0.99 lb)
Shipping Units	6 pcs
Bolt Quantity	4 pcs
Bolt Diameter	5.5 mm (0.22 in)