
CT382



1.5" 6 Ohm Tweeter

Diaphragm Material	Aluminum
Voice Coil Diameter	38 mm 1.5 in
Continuous Power Handling	400 W

DATASHEET DRAWINGS

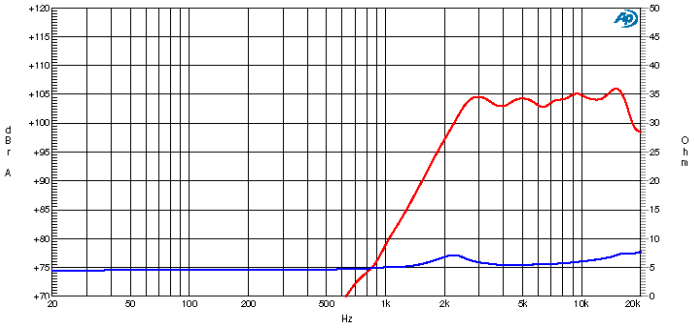

DRAWINGS

CT382

SPECIFICATIONS

Nominal Diameter	38 mm (1.5 in)
Nominal Impedance	6 ©
Nominal Power Handling	200 W Nominal power is determined according to AES2-1984 (r2003) standard.
Continuous Power Handling	400 W Program Power is defined as 3 dB greater than the Nominal rating.
Sensitivity	105 dB W/1m Sensitivity represents the averaged value of acoustic output as measured on the forward central axis of cone, at distance 1m, when connected to 2,83V sine wave test signal.
Frequency Range	4000 kHz - 20000 kHz Frequency range is given as the band of frequencies delineated by the lower and upper limits where the output level drops by 10 dB below the rated sensitivity in half space environment.
Voice Coil Diameter	38 mm (1.5 in)
Winding Depth	1.5 mm (0.06 in)
Diaphragm Material	Aluminum

PARAMETERS

Fs	2000 Hz
Re	4.5 ©
Le	0.03 mH

DESIGN

Cone Shape	Planar
Connection Type	Faston
Cone Material	Aluminum

MOUNTING AND SHIPPING INFO

Overall Diameter	150 mm (5.91 in)
Bolt Circle Diameter	135 mm (5.31 in)
Baffle Cutout Diameter	105 mm (4.13 in)
Depth	63 mm (2.48 in)
Flange and Gasket Thickness	3 mm (0.12 in)
Net Weight	2 kg (4.41 lb)
Shipping Units	6 pcs
Bolt Quantity	4 pcs
Bolt Diameter	5 mm (0.2 in)