
CW261SPL




10" 8 Ohm Low Frequency Driver

Voice Coil Diameter	64 mm 2.5 in
Continuous Power Handling	600 W
Sensitivity	96.5 dB

DATASHEET DRAWINGS

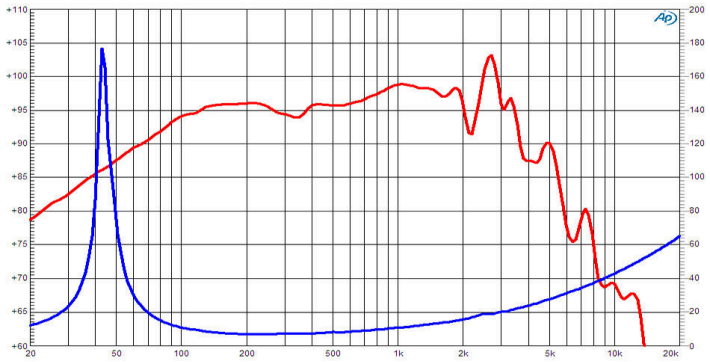

DRAWINGS

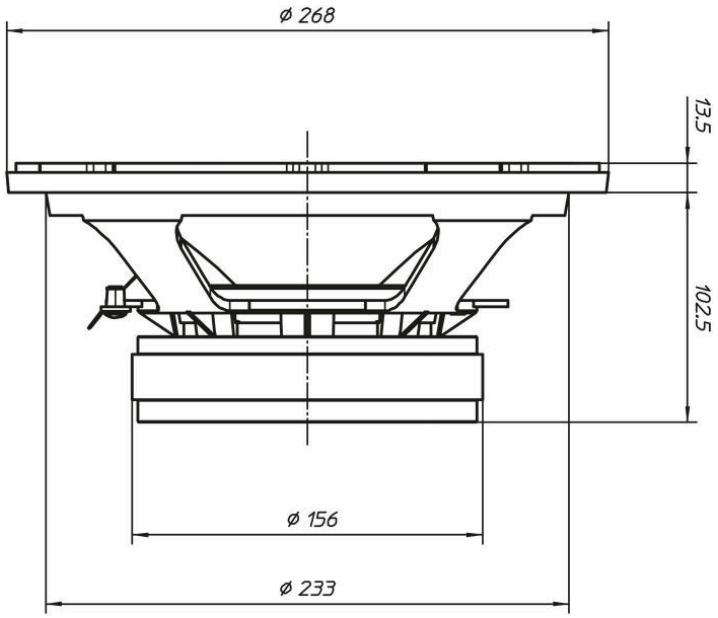

CW261SPL

SPECIFICATIONS

Nominal Diameter	250 mm (10 in)
Nominal Impedance	8 ©
Nominal Power Handling	300 W Nominal power is determined according to AES2-1984 (r2003) standard.
Continuous Power Handling	600 W Program Power is defined as 3 dB greater than the Nominal rating.
Sensitivity	96.5 dB W/1m Sensitivity represents the averaged value of acoustic output as measured on the forward central axis of cone, at distance 1m, when connected to 2,83V sine wave test signal.
Frequency Range	50 Hz - 3500 Hz Frequency range is given as the band of frequencies delineated by the lower and upper limits where the output level drops by 10 dB below the rated sensitivity in half space environment.
Voice Coil Diameter	64 mm (2.5 in)
Former Material	Glass fiber
Winding Depth	15 mm (0.59 in)

PARAMETERS

Fs	44 Hz
Sd	356 cm² (55.18 in²)
d	213 mm (8.39 in)

DESIGN

Surround Shape	Nomex Fabric
Recommended Enclosure	29 dm³ (1.024 ft³)
Recommended Loading	Vented Box
Connection Type	Faston
Suspension	Nomex Fabric
Cone Material	Doped cellulose fiber

MOUNTING AND SHIPPING INFO

Overall Diameter	266 mm (10.47 in)
Bolt Circle Diameter	253 mm (9.96 in)
Baffle Cutout Diameter	235 mm (9.25 in)
Depth	116.5 mm (4.59 in)
Flange and Gasket Thickness	13.5 mm (0.53 in)
Net Weight	4.07 kg (8.96 lb)
Shipping Units	2 pcs
Basket Material	Aluminum
Bolt Quantity	8 pcs
Bolt Diameter	5 mm (0.2 in)