PROFESSIONAL LOUDSPEAKERS

8PR320

8" - 300 W - 95 dB - 8 Ohm



NOMINAL SPECIFICATIONS

Nominal Diameter	200 mm (8 in)
Overall Diameter	223.7/207.9 mm (8.81/8.18 in)
Bolt Circle Diameter	210 mm (8.27 in)
Baffle Cutout Diameter	183 mm (7.20 in)
Depth	99.5 mm (3.92 in)
Flange and Gasket Thickness	11 mm (0.43 in)
Net Weight	**2.45 kg (5.4 lb)**
Shipping Box (Single Carton Box)	235 x 235 x 155 mm (9.3 x 9.3 x 6.1 in)
Shipping Weight	3.2 kg (7.1 lb)

PART NUMBER

Faston Terminals - 8 Ohm Version	02004338
Recone Kit - 8 Ohm Version	R2004338

TECHNICAL PARAMETERS

Nominal Impedance	8 Ohm
Minimum Impedance	6.1 Ohm
AES Power Handling **(1)**	300 W
Maximum Power Handling (2)	**600 W**
Sensitivity (1W/1m)	**95 dB**
Frequency Range	60÷4000 Hz
Voice Coil Diameter	**65 mm (2.56 in)**
Winding Material	Al
Former Material	Glass Fiber
Winding Depth	17.4 mm (0.69 in)
Magnetic Gap Depth	**8.2 mm (0.32 in)**
Flux Density	1.2 T
Magnet	Neodymium Slug
Basket Material	Aluminum
Demodulation	No
Cone Surround **(3)**	Triple Roll
NET Air Volume filled by Loudspeaker	0.82 dm^3 (0.029 ft^3)
Spider Profile	1x variable height waves

THIELE & SMALL PARAMETERS

Fs	65 Hz
Re	5.4 Ohm
Qes	0.43
Qms	8.2
Qts	0.41
Vas	13.1 dm^3 (0.46 ft^3)
Sd	223 cm^2 (34.57 in^2)
Xmax **(4)**	7.33 mm
Xdamage **(5)**	16.85 mm
Mms	31.7 g
Bl	12.9 N/A
Le	0.52 mH
Mmd	27.9 g
Cms	0.19 mm/N
Rms	1.6 kg/s
Eta Zero	0.83 %
EBP	151 Hz

NOTES:


(1) 2 Hours Test According to AES 2-1984 Rev. 2003


(2) Maximum power is defined as 3dB greater than nominal power.


(3) Treated Polycotton

(4) Xmax= [(winding depth - magnetic gap depth)/2] + (magnetic gap depth/3)

(5) Maximum excursion before permanent damage

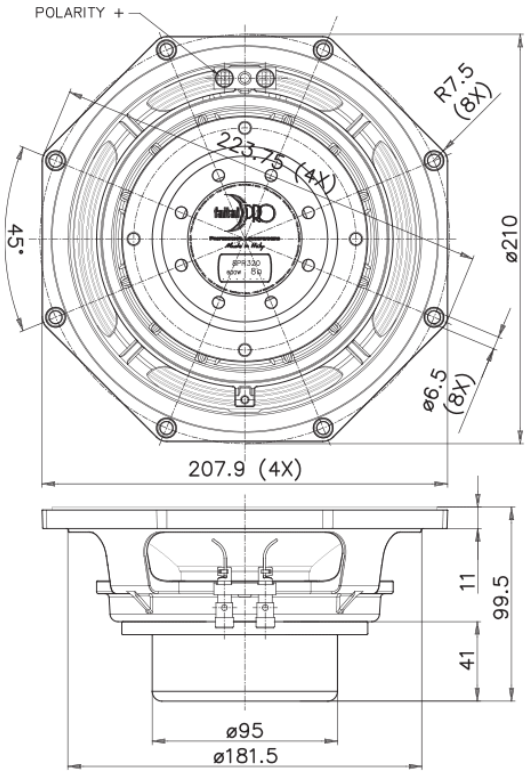

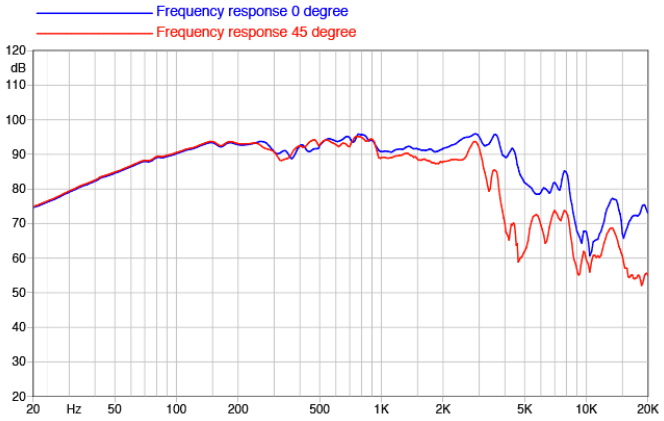

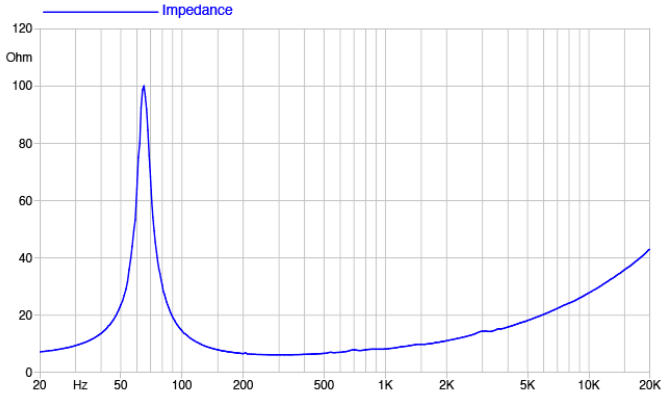

©Copyright 2026 **Faital S.p.A.** • All rights reserved.