# PHT-404

*High Frequency Horn-Drivers*



## Features

- Small speaker horn driver.
- 80 Watts Peak Power Handling
- Phenolic Resin 1.0” Diaphragm Diameter
- Ferrite Magnetics






## GENERAL SPECIFICATIONS


| | |
|---|---|
| Diaphragm diameter | 25.4 mm / 1 in |
| Power handling | 20 W |
| Impedance | 8 Ohm |
| Sensitivity (1w/1m) | 105 dB |
| Frequency range | 3000 - 16000 Hz |
| Cutoff frequency | 3000 Hz |
| Nominal coverage angle (HxV) -6dB | 100° x 60° |
| Material | Cast Aluminium |
| Magnet type | Ferrite |
| Diaphragm material | Phenolic Resin |
| Baffle cutout dimension | 85 x 240 mm / 3.35 x 9.45 in |

## SHIPPING INFORMATION


| | |
|---|---|
| Unit weight | 1.1 kg / 2.43 lb |
| Shipping Weight | 1.3 kg / 2.87 lb |
| Packaging dimension | 270 x 115 x 205 mm |
| WxDxH | 10.63 x 4.53 x 8.07 in |

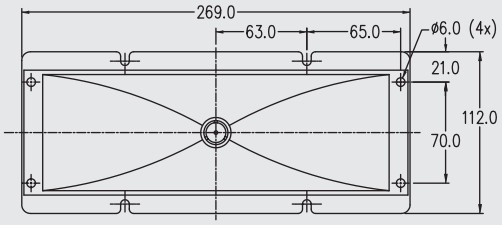


TOP VIEW

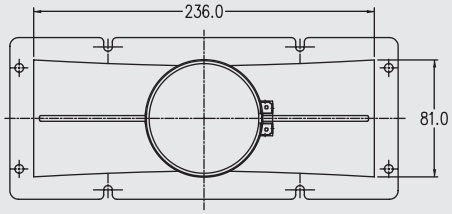



BOTTOM VIEW

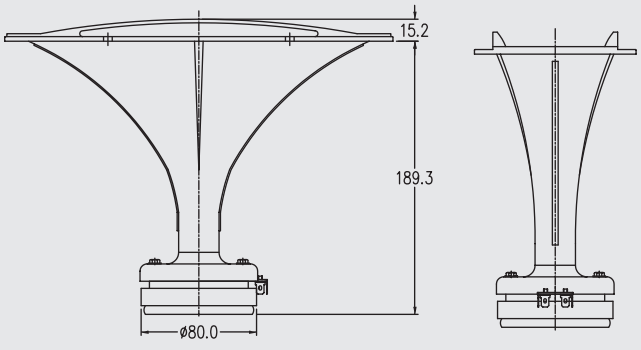


FRONT VIEW

SIDE VIEW

## Frequency response and Impedance curve

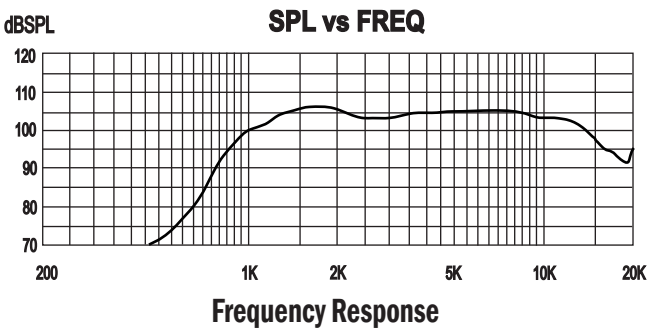


SINCE 1991
STH PROFESSIONAL AUDIO CO.,LTD.
AIA Sathorn Tower, unit 1607-1608, 16th floor, No.11/1, South Sathorn Road, Yannawa, Sathorn, Bangkok 10120