BM 3022

PAGING MICROPHONE



Description

Gooseneck microphone with hi-quality unidirectional electret capsule Direct connection to power amplifiers input through CAT5 cable Adjustable line output with RJ45 connector Switchable automatic gain control (AGC) Up to 30 BM 3022 paging microphones can be linked in a ‘daisy-chain’ Selectable mixing, interlocking or priority mode among devices When activating a microphone, the announcement can be preceded by a chime.

Features

› Up to 30 BM 3022 paging microphones can be linked in a ‘daisy-chain’


Part Number

14322013	BM 3022	Grey	EAN 8024530007034

BM 3022

PAGING MICROPHONE

Line Art 2D

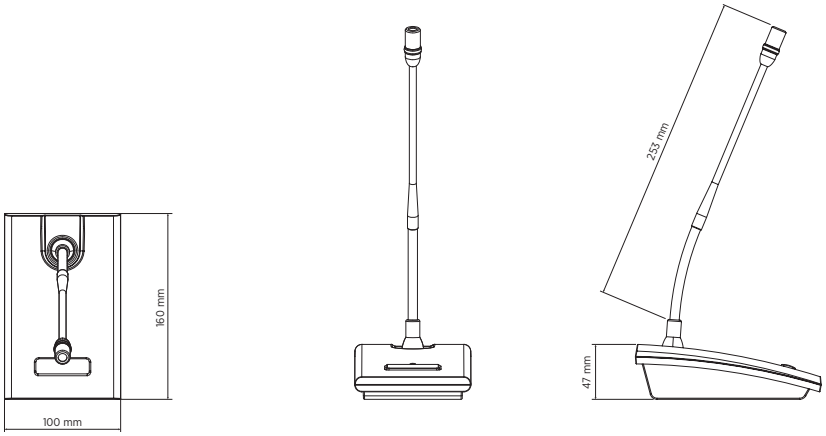

TECHNICAL SPECIFICATIONS

Microphone specifications	Type	Desktop paging microphone with electret capsule
	Directivity	Cardioid
	Sensitivity	-65 dB
	Frequency Response (-3dB)	200 Hz - 7 kHz
	Output impedance (ohm)	130.00 ohm
	Minimum load impedance (ohm)	470.00 ohm
	Signal / Noise ratio @1kHz	82.00 dB
	Total harmonic distortion @1 kHz	0.65 %
Console specifications	Console Type	Paging
	Working with	DXT 3000
	General call	Yes
	Preamplified	Yes
	LED indicators	Yes
Power requirement	Operating voltage	24.00V ~ Hz
	Power consumption	2.80 mA
Connections	Connectors	RJ45
Functionalities	Priority	Yes
	VOX facility	Yes
	Chime tone generator	Yes
	Smart PTT	Yes
	Automatic gain control	Yes
Accessories	Cable included	Yes
	Cable length (m)	5

BM 3022

PAGING MICROPHONE

Standard compliance	Safety agency	CE compliant
Physical specifications	Cabinet/Case Material	Plastic
	Color	Grey
Size / Weight	Height	48 mm / 1.89 inches
	Width	100 mm / 3.94 inches
	Depth	159 mm / 6.26 inches
	Weight	0.74 kg / 1.63 lbs