MR 52EN

TWO-WAY BASS REFLEX SPEAKER



Description

MR 52EN is a compact two-way speaker ideal for both alarm messages broadcasting and business music systems. The installation is fast and efficient using the adjustable mounting bracket (included). The enclosure is made of high-density ABS and includes a protective steel grille and connection cover. The terminal connection blocks, for input and output flameproof cables, are made of ceramic material. A thermal fuse protects the integrity of the line in case of heat affecting the speaker. Power selectable with dedicated switch.

Features

- 5" woofer with 1" dome tweeter
- Power selectable (100 V): 30 W – 15 W – 7.5 W – 3.75 W
- 89 dB sensitivity
- Colour white RAL 9016
- Flameproof ABS body, steel grille
- In/out ceramic terminal block
- Thermal fuse protection


Part Number

13100010	MR 52EN W	8ohm	White - RAL 9016	EAN 8024530014438

MR 52EN

TWO-WAY BASS REFLEX SPEAKER

Line Art 2D

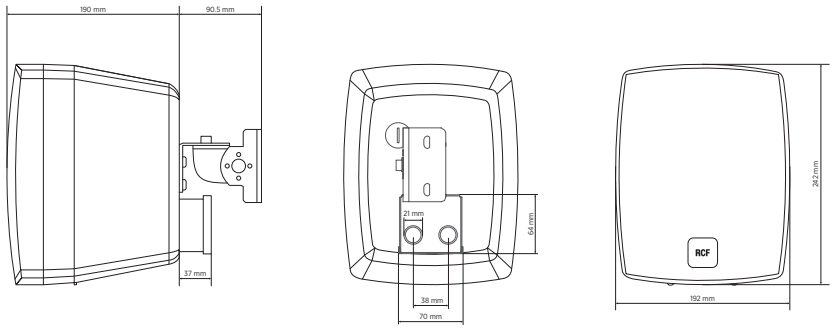

TECHNICAL SPECIFICATIONS

Acoustical specifications	Frequency Response (-10dB)	80 Hz - 20000 Hz
	Max SPL @ 1m	103 dB
	Max SPL @ 4m	91 dB
	Coverage angle	180°
	System Sensitivity	89 dB
	System Sensitivity 1W @ 4m	77 dB
Power section	Power Handling	30 W
	Peak Power Handling	120 W PEAK
	Protections	Thermal fuse
	Recommended Amplifiers	DXT 3000, DXT 4000, DXT 7000
Transducers	Dome Tweeter	1 x 1.0''
	Woofer	1 x 5.0''
Input/Output section	Input connectors	Ceramic screw terminals
	Output connectors	Ceramic screw terminals
	Constant Voltage Transformer	100 V
	Power selection 1	30 W - 333 ohm
	Power selection 2	15 W - 667 ohm
	Power selection 3	7.5 W - 1333 ohm
	Power selection 4	3.75 W - 2667 ohm
Standard compliance	Safety agency	CE compliant
	EN54-24 certified	Yes
	CPR number	1488-CPR-0591/W

MR 52EN

TWO-WAY BASS REFLEX SPEAKER

Physical specifications	Cabinet/Case Material	ABS
	Grille	Steel
	Color	White - RAL 9016, Black - RAL 9005
Size / Weight	Height	242 mm / 9.53 inches
	Width	192 mm / 7.56 inches
	Depth	190 mm / 7.48 inches
	Weight	3 kg / 6.61 lbs