XPS 4KD

FOUR CHANNELS DSP POWER AMPLIFIER WITH DANTE



Description

XPS 4KD is a four-channel power amplifier with advanced processing and analog/digital routing options for high demanding install sound applications. With 4x1000 W Class D continuous power at 4 ohms, 40-bit floating-point processing at 96 kHz, and 32-bit internal routing, XPS 4KD packs a remarkable power density in a 2U chassis. Designed for top quality installed sound systems, XPS 4KD is intended for use with high-performance speakers and provides ready-to-use configurations and presets. It can also be used in linear mode with advanced tuning capabilities. Each output features: 4000 ms output delay (1372 m / 4501 ft), EQ Filters, Crossovers, FIR Filters, Multiband Compressor, RMS Limiter, and Thermal limiter. XPS delivers rider-friendly premium sound with full RDNet remote management, large touch interface onboard, exceptional signal/noise ratio, ultra-low distortion, and extreme dynamic range. In addition to the standard model, it offers 8 DANTE digital input channels.

Features

› 4000 W Total Continuous Power
› 40-bit Floating-point DSP and 32-bit routing up to 96 kHz
› Dante Audio Network
› FiRPHASE, Bass Motion Control, Bass Shaper
› RDNet Networked Management
› Touch 4.3" Color TFT Interface
› Full On-board Processing with Delay, EQ, Comp/Limiter
› On-board Speaker Presets Library
› Class-D Modules with SMPS and Advanced PFC
› 8 DANTE digital input channels

Part Number

12100084	XPS 4KD	EU	100-240 V	Black - RAL 9005	EAN 8024530024741
12100086	XPS 4KD	US	100-240 V	Black - RAL 9005	EAN 8024530024253

Products are continually improved. All specifications are therefore subject to change without notice.

XPS 4KD


FOUR CHANNELS DSP POWER AMPLIFIER WITH DANTE

12100126 XPS 4KD UK 100-240 V Black - RAL 9005 EAN 8024530024994

Line Art 2D

XPS 4KD

FOUR CHANNELS DSP POWER AMPLIFIER WITH DANTE

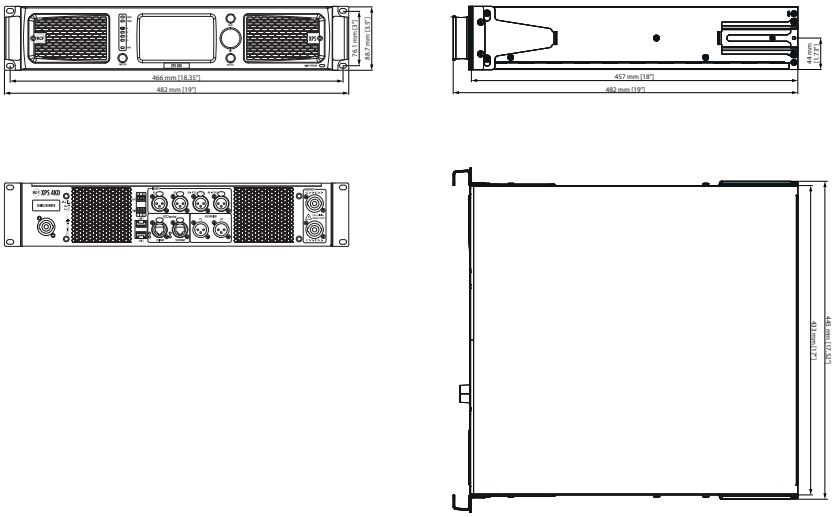

TECHNICAL SPECIFICATIONS

Amplifier specifications	Amplifier Class	D
	Output Power (EIAJ 8:32 all channels driven)	4 x 1000 W @ 4 ohm 4 x 700 W @ 8 ohm
	Frequency Response (-3dB)	20 Hz - 23000 Hz
	SNR Analog inputs (unweighted)	>108 dB
	SNR Digital inputs (unweighted)	>112 dB
	Crosstalk	<70 dB
	Distortion (THD+N) (20 Hz - 20000 Hz,250 W @ 4 ohm)	<0.2 %
	Gain (linear mode @ 0 dB)	32 dB
	Damping factor (@ 4 ohm, 20 Hz - 1500 Hz)	>200
	Max burst length (@ 50 Hz, CF = 7 dB, 4 ohm, 1% THD+N)	100 ms
Input section	Total number of inputs	16
	Line inputs	4
	Line connectors	XLR
	Digital inputs	12
	Digital connectors	Ethercon, XLR
	Digital type	AES/EBU, DANTE
	General Purpose Inputs (GPI)	2
	Programmable GPI	Yes
	Photo-coupled GPI	2

XPS 4KD

FOUR CHANNELS DSP POWER AMPLIFIER WITH DANTE

Output section	Signal output number	4
	Signal output connectors	XLR
	Power output connectors	Speakon
	General Purpose Outputs (GPO)	3
	Programmable GPO	Yes
Processing	DSP	2 SHARC, 40-bit floating point, 96 kHz 2 ADAU, 32-bit fixed point, 96 kHz
	EQ Filters	Peaking, HI/LO-shelving, HI/LO-pass (Butterworth, Linkwitz-Riley, Bessel)
	Advanced algorithms	FiRPHASE technology, BASS shaper, air compensation, mid-low correction, driver excursion control, dynamic PEQ, multi-band compressor, pilot tone detection, backup recovery strategy, impedance load measurement
	Compressors	RMS limiter, dynamic compressor, power limiter, thermal compressor
	Delay	0 ÷ 4000 ms (each channel)
	Tone controls	Yes
	High-pass filter	10 Hz - 1000 Hz
	Crossover	2500 - 3500 Hz
	Automatic Gain Control (ACG)	Yes
Configuration and control	Configuration	Front panel touch screen, PC Software
	Network	Gigabit ethernet
	RCF speakers presets	Yes
	Priority	Yes
	Protocols for system integration	Proprietary OSC based protocol
	RDNet	Onboard
Protections	Cooling	Forced
	Short circuit	Yes
	Thermal	Yes
	DC	Yes
	Fuses	Yes
	VHF (Very High Frequencies)	Yes
Operating conditions	Temperature range - Continuous operation	-5°C - +40°C / +23°F - +104°F
	Temperature range - Reduced output power	-5°C to +50°C / +23°F to +122°F
	Fan noise idle	<28 dBA
	Fan noise max	<48 dBA

XPS 4KD

FOUR CHANNELS DSP POWER AMPLIFIER WITH DANTE

Power requirement	Operating voltage	100-240 V~ 50/60Hz
	Nominal current AC @ 100-120 V	14 A
	Nominal current AC @ 220-240 V	8 A
	Stand by power consumption	30 W
	Idle power consumption	100 W
	Power consumption	2600 W
	Main fuse	Internal
Standard compliance	Safety agency	CE compliant
Physical specifications	Cabinet/Case Material	Metal
	Handles	2 metal handles for rack mount
	Color	Black - RAL 9005
	Rack mounting	19", 2U
Size / Weight	Height	88.7 mm / 3.49 inches
	Width	482 mm / 18.98 inches
	Depth	482.4 mm / 18.99 inches
	Weight	11 kg / 24.25 lbs