
6A200M-4

200W 6.5” 4-Ohm Midrange

KEY FEATURES

- High-power 200W* midrange with 1.5” copper voice coil and polyimide former
- Sturdy steel basket with vented back plate for superior cooling
- Proprietary Acquafoca™ cone treatment for water and UV resistance
- Loud, 91 dB sensitive design with a maximum SPL potential of over 110 dB
- Strong, low-distortion performance from 150 Hz to 5 kHz



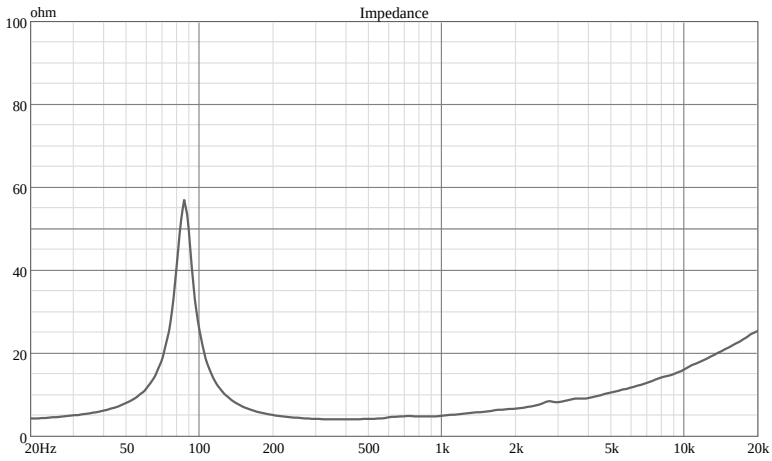

GENERAL SPECIFICATIONS

Nominal Basket Diameter	6.5" (165.1 mm)
Nominal Impedance	4 Ω
Power Rating Watts	100 Watts
Power Rating Music Program	200 Watts
Resonance	86.32 Hz
Usable Frequency Range	86 Hz - 5 kHz
Sensitivity	91.3 dB
Magnet Weight	20 oz (566.98 g)
Gap Height	0.25“ (6.35 mm)
Nominal Voice Coil Diameter	1.5" (38.1 mm)

MOUNTING INFORMATION

Overall Diameter	6.59" (167.39 mm)
Baffle Hole Diameter	5.70" (144.78 mm)
Mounting Hole Diameter	0.271" (5.5118 mm)
Depth	2.8" (71.72 mm)
Shipping Weight	4.4 lbs (2 kg)
Net Weight	4 lbs (1.81 kg)
Volume Displaced	24.40 in3 (0.40 liters)

THIELE-SMALL PARAMETERS

Re	3.60 Ω
Inductance	0.21 mH
Qms	7.82
Qes	0.51
Qts	0.48
BL	4.61 TM
Vas	0.28 cuft (7.87 liters)

