# SUB 9019-AS

HIGH POWER 19" ACTIVE SUBWOOFER



**Description**

SUB 9019-AS is a high-performance 19" active subwoofer delivering up to 138 dB Max SPL, powered by a robust 4000W Class-D amplifier. Designed for rigorous touring, the SUB 9019-AS features a tour-ready, weatherproof cabinet with a durable Polyurea finish and a detachable front cart for easy transport. Control is precise with RDNet network management, offering adjustable EQ, delay, cardioid options, and tailored crossover presets for RCF speakers. Innovative contactless configuration via RDTap allows seamless setup even when the unit is unpowered, ensuring perfect integration every time. Despite its small footprint and lightweight cabinet , the SUB 9019-AS produces powerful yet articulate bass, remaining true to even the most subtle low-frequency variations.

**Features**

- 138 dB Max SPL
- 4000W Class-D Amplification
- RDTap Contactless Configuration
- I/O Panel Rain Cover Included
- RDNet Networked Control
- BMC, EQ, DLY, Cardioid
- ACE Crossover Presets for RCF Speakers
- 19" High-Excursion Precision Transducer
- Detachable Front Cart (sold separately)
- powerCON TRUE1 TOP AC Connector


**Part Number**

| | | | | | |
|---|---|---|---|---|---|
| 13000890 | SUB 9019-AS | EU | 100-240 V | Black | EAN 8024530022679 |
| 13000908 | SUB 9019-AS | US | 100-240 V | Black | EAN 8024530022846 |

# SUB 9019-AS

HIGH POWER 19" ACTIVE SUBWOOFER

Line Art 2D

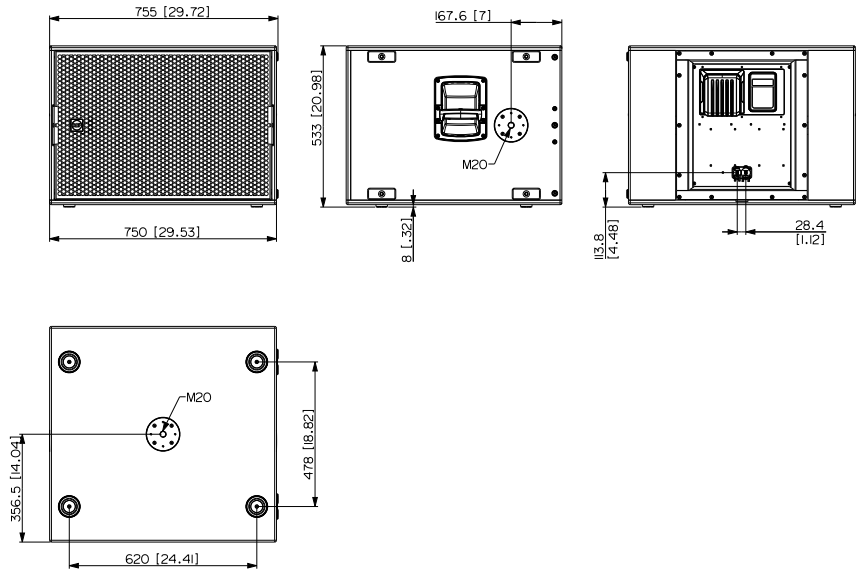


**TECHNICAL SPECIFICATIONS**

| | | |
|---|---|---|
| Acoustical specifications | Frequency Response | 30 Hz - 200 Hz |
| | Max SPL @ 1m | 138 dB |
| Transducers | Woofer | 1 x 19" neo, 4.0" v.c |
| Input/Output section | Input signal | bal/unbal |
| | Input connectors | XLR, RDNet Ethercon |
| | Output connectors | XLR, RDNet Ethercon |
| | Input sensitivity | -2 dBu/+4 dBu |
| Processor section | Protections | Thermal |
| | Limiter | Soft Limiter |
| | Controls | MUTE, VOL, PRESETS, RDTAP |
| | RDNet | Onboard |
| Power section | Total Power | 4000 W Peak |
| | Cooling | Convection/Forced |
| | Connections | Powercon TRUE1 TOP IN/OUT |
| Standard compliance | Safety agency | CE compliant |
| Physical specifications | Cabinet/Case Material | Plywood |
| | Hardware | 2 x M20 pole mount accessories |
| | Handles | 1 handle per side |
| | Pole mount/Cap | M20 thread |
| | Grille | Steel with clothing |
| | Color | Black |

# SUB 9019-AS

HIGH POWER 19" ACTIVE SUBWOOFER

**Size / Weight**

| | |
|---|---|
| Height | 533 mm / 20.98 inches |
| Width | 755 mm / 29.72 inches |
| Depth | 713 mm / 28.07 inches |
| Weight | 53.4 kg / 117.73 lbs |

## ACCESSORIES

**Rigging / Mounting**

**FLY BARS**

| | | | |
|---|---|---|---|
| 13360676 | FLB60676 | Black | EAN 8024530024635 |
| 13360677 | FLB60677 | Black | EAN 8024530023713 |

**FLYING BRACKETS**

| | | | |
|---|---|---|---|
| 13360673 | FLB60673 | Black | EAN 8024530024024 |

**POLE MOUNT KITS**

| | | | |
|---|---|---|---|
| 13360067 | PM-KIT M20 | Black | EAN 8024530014599 |

**STACKING KITS**

| | | | |
|---|---|---|---|
| 13360727 | STK60727 | Black | EAN 8024530024970 |
| 13360728 | STK60728 | Black | EAN 8024530024871 |
| 13360750 | STK60750 | Black | EAN 8024530025007 |

**Protections**

**COVERS**

| | | | |
|---|---|---|---|
| 13360658 | CVR60658 | Black | EAN 8024530023409 |

**Transportation**

**KART WITH WHEELS**

| | | | |
|---|---|---|---|
| 13360657 | CRT60657 | Black | EAN 8024530023638 |